

Autodesk® AutoCAD® Architecture 2014 Fundamentals



Elise Moss

Visit the following websites to learn more about this book:



[amazon.com](https://www.amazon.com)

[Google books](https://books.google.com)

[BARNES & NOBLE](https://www.barnesandnoble.com)

Lesson 3

Floor Plans

The floor plan is central to any architectural drawing. In the first exercise, we convert an AutoCAD 2D floor plan to 3D. In the remaining exercises, we work in 3D.


Exercise 3-1:


Going from a 2D to 3D Floor plan


Drawing Name: New
Estimated Time: 45 minutes


This exercise reinforces the following skills:


- Create Walls
- Wall Properties
- Wall Styles
- Style Manager
- Insert an AutoCAD drawing
- Trim, Fillet, Extend Walls


1.  Start a new drawing using QNEW.

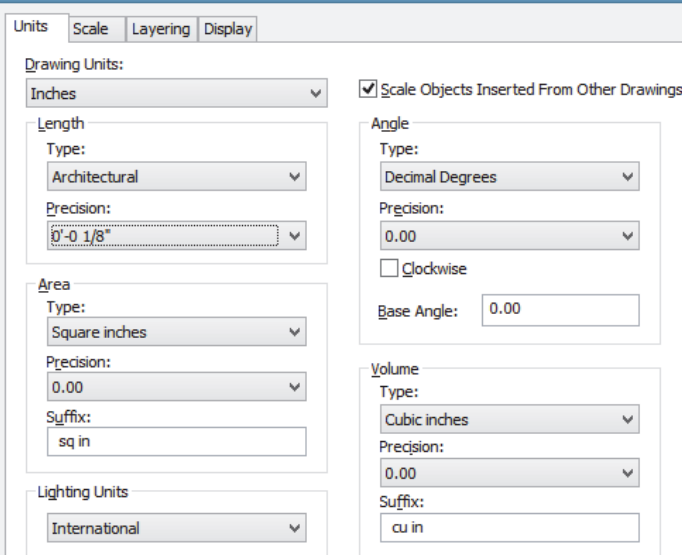
2.  Type **UNITS** on the command line.
Set the Units to **Inches**.
Set the Type to **Architectural**.
Set the Precision to **0' 1/8"**.
Press **OK**.

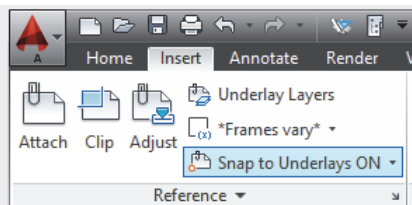
3.  Activate the **Insert** ribbon.
Select **Attach**.

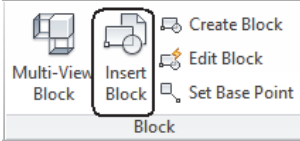
4.  Activate the **Insert** ribbon.
Select **Insert Block**.

5.  Locate the *autocad_floor_plan.dwg* file in the exercises.

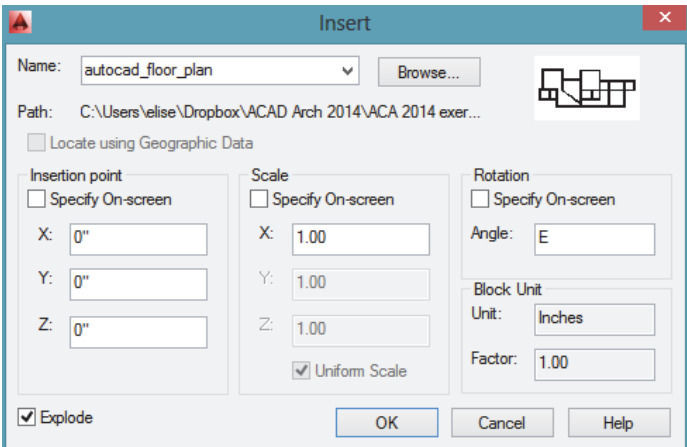
6.  Uncheck Insertion Point.
Uncheck Scale.
Uncheck Rotation.
This sets everything to the default values.
Enable **Explode**.
Press **OK**.

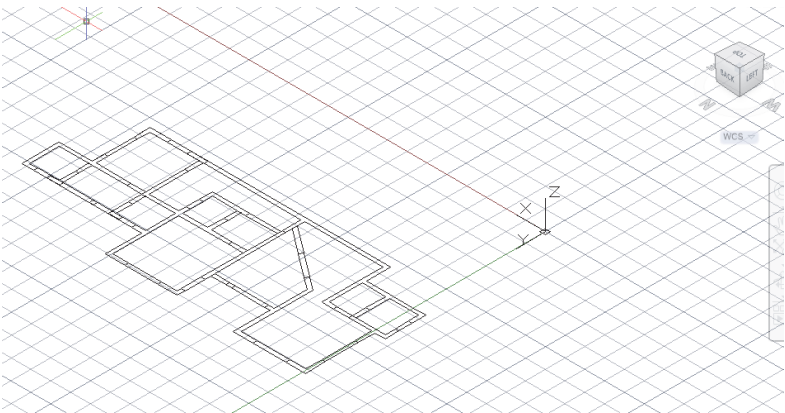7.  Use the ViewCube to switch to a 3D view.
Note that the AutoCAD file is 2D only.
Return to a top view.



8.  Activate the **Home** ribbon.
Select the **Measure** tool on the Inquiry panel.

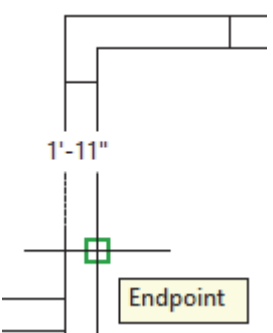9.  Measure a wall thickness.
Note that the walls are 1'-11" thick.

10. Launch the **Design Tools** palette from the Home ribbon.





- 11.

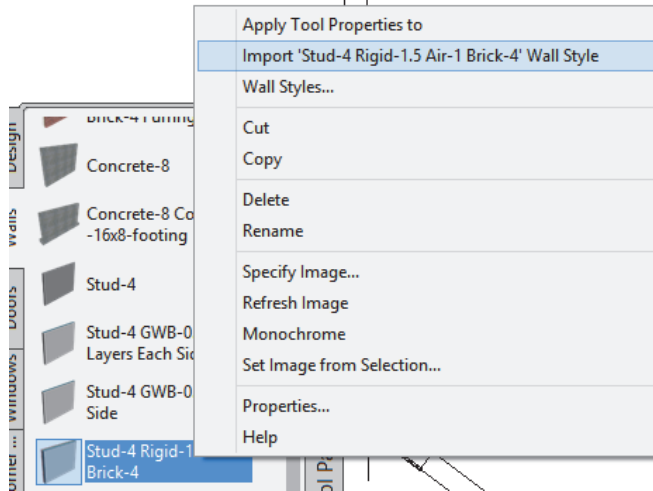

Locate the Stud-4 Rigid-1.5 Air-1 Brick-4 wall style. Right click and select **Import Stud-4 Rigid-1.5 Air-1 Brick-4 Wall Style**.

This adds the wall style to the active drawing.


- 12.

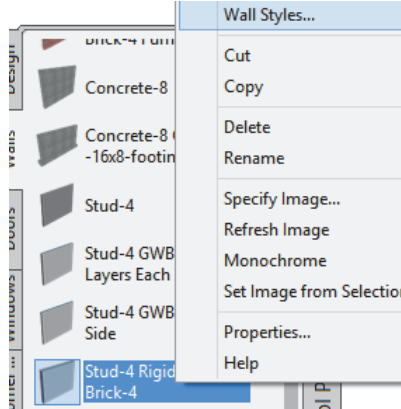

Locate the Stud-4 Rigid-1.5 Air-1 Brick-4 wall style. Right click and select **Wall Styles**.

This launches the Style Manager.

- 13.



Note that the only wall styles available are Standard and the style that was just imported.

Highlight the **Stud-4 Rigid-1.5 Air-1 Brick-4** wall style.

- 14.


| Index | Name | Priority | Width | Edge Offset | Function | Dimension |
|-------|----------------|----------|--------|-------------|----------------|--|
| 1 | Brick Ven... | 810 | 4" | 2 1/2" | Non-Structural | <input checked="" type="checkbox"/> <input type="checkbox"/> |
| 2 | Air Gap | 700 | 1" | 1 1/2" | -- | <input type="checkbox"/> <input type="checkbox"/> |
| 3 | Rigid Insul... | 600 | 1 1/2" | 0" | Non-Structural | <input type="checkbox"/> <input type="checkbox"/> |
| 4 | Stud | 500 | 4" | -4" | Structural | <input checked="" type="checkbox"/> <input type="checkbox"/> |
| 5 | GWB | 1200 | 5/8" | -4 5/8" | Non-Structural | <input type="checkbox"/> <input type="checkbox"/> |



Note the components listed in the Style Manager for the wall style. The total wall thickness is 11.125".

We need a wall style that is 1'-11". We need to add 11 7/8" of material to the wall style.


15.  Select the **Add Component** tool.

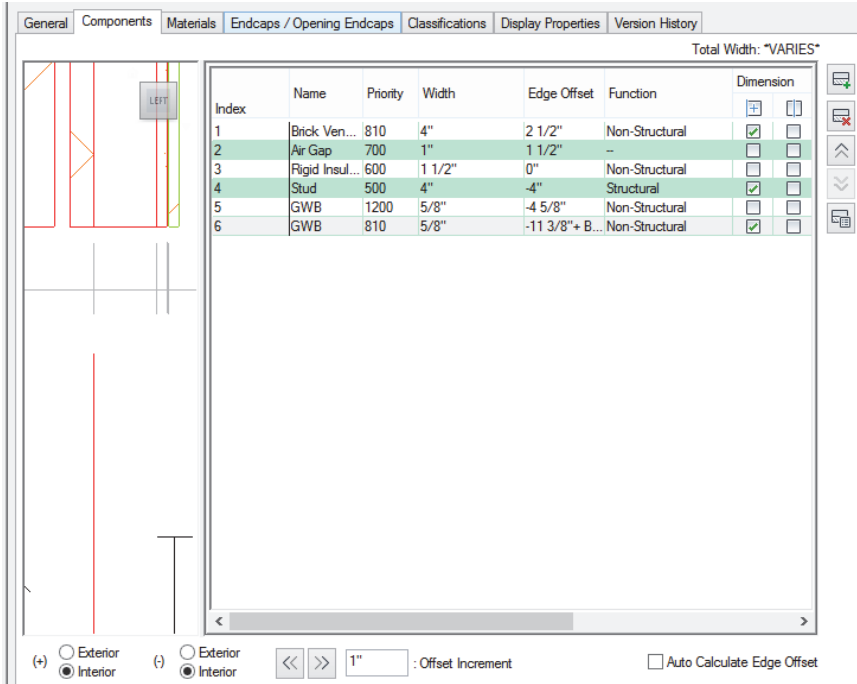16. 

| Index | Name | Priority | Width | Edge Offset | Function | Dimension |
|-------|----------------|----------|--------|----------------|----------------|-------------------------------------|
| 1 | Brick Ven... | 810 | 4" | 2 1/2" | Non-Structural | <input checked="" type="checkbox"/> |
| 2 | Air Gap | 700 | 1" | 1 1/2" | - | <input type="checkbox"/> |
| 3 | Rigid Insul... | 600 | 1 1/2" | 0" | Non-Structural | <input type="checkbox"/> |
| 4 | Stud | 500 | 4" | -4" | Structural | <input checked="" type="checkbox"/> |
| 5 | GWB | 1200 | 5/8" | -4 5/8" | Non-Structural | <input type="checkbox"/> |
| 6 | GWB | 810 | 5/8" | -11 3/8"+ B... | Non-Structural | <input checked="" type="checkbox"/> |

Position another 5/8" piece of GWB (gypsum board) so it is on the interior side.

17.  Select the **Add Component** tool.

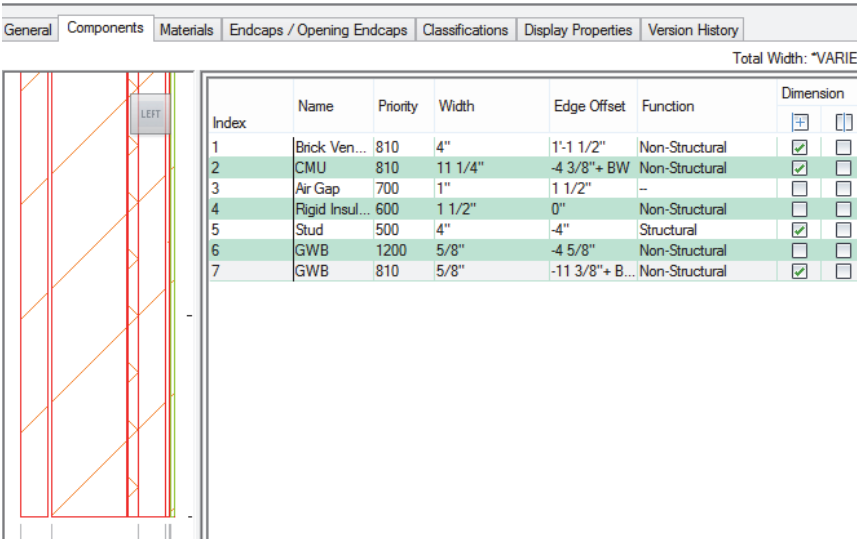18. 

| Index | Name | Priority | Width | Edge Offset | Function | Dimension |
|-------|----------------|----------|---------|----------------|----------------|-------------------------------------|
| 1 | Brick Ven... | 810 | 4" | 1'-1 1/2" | Non-Structural | <input checked="" type="checkbox"/> |
| 2 | CMU | 810 | 11 1/4" | -4 3/8"+ BW | Non-Structural | <input checked="" type="checkbox"/> |
| 3 | Air Gap | 700 | 1" | 1 1/2" | - | <input type="checkbox"/> |
| 4 | Rigid Insul... | 600 | 1 1/2" | 0" | Non-Structural | <input type="checkbox"/> |
| 5 | Stud | 500 | 4" | -4" | Structural | <input checked="" type="checkbox"/> |
| 6 | GWB | 1200 | 5/8" | -4 5/8" | Non-Structural | <input type="checkbox"/> |
| 7 | GWB | 810 | 5/8" | -11 3/8"+ B... | Non-Structural | <input checked="" type="checkbox"/> |


Add a layer called CMU that is 11.25" thick.


Position the CMU so it is behind the brick veneer.

19. Verify that your layers are set as shown.

| Index | Name | Priority | Width | Edge Offset | Function | Dimension | | | Bottom Elevation |
|-------|------------------|----------|---------|--------------|----------------|-------------------------------------|--------------------------|-------------------------------------|------------------|
| | | | | | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | |
| 1 | Brick Veneer | 810 | 4" | 1'-1 1/2" | Non-Structural | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 0" |
| 2 | CMU | 810 | 11 1/4" | -4 3/8"+ BW | Structural | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 0" |
| 3 | Air Gap | 700 | 1" | 1 1/2" | - | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 0" |
| 4 | Rigid Insulation | 600 | 1 1/2" | 0" | Non-Structural | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 0" |
| 5 | Stud | 500 | 4" | -4" | Structural | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | 0" |
| 6 | GWB | 1200 | 5/8" | -4 5/8" | Non-Structural | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | 0" |
| 7 | GWB | 810 | 5/8" | -11 3/8"+ BW | Non-Structural | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | 0" |

20. Press **OK** to close the Styles Manager dialog.

21.  Locate the **Stud-4 Rigid-1.5 Air-1 Brick-4** wall style on the Walls tab of the Design Palette.

22.  Right click on the wall style and select **Properties**.

23.  Under Dimensions:
Set Justify to **Left** using the drop-down.

This sets the location line for the wall.

24.  Right click on the **Stud-4 Rigid-1.5 Air-1 Brick-4** wall style and select **Apply Tool Properties to** → **Linework**.


25.  Select the outside segments of the walls.

Do not select any of the interior walls.

Press **ENTER** when you are done selecting lines.

26. You will be prompted if you want to erase any of the linework. Enter **NO**.

27.

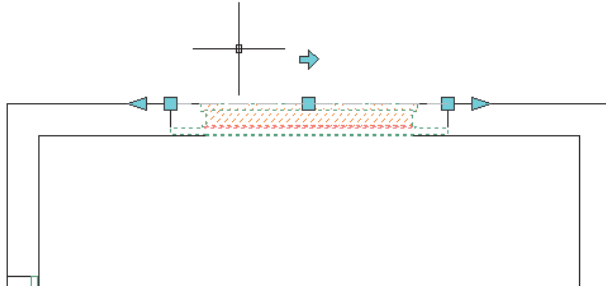


Zoom into one of the walls that was placed.

Note that it is the correct width. The blue arrow indicates the exterior side of the wall. If the blue arrow is inside the building, click on the blue arrow and it will flip the orientation of the wall.

If necessary, move walls so they are aligned with the floor plan's walls.


28.

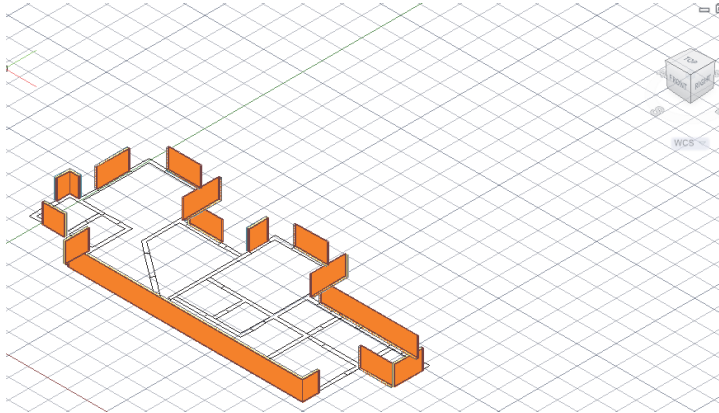

Switch to a 3D view.


You should see 3D walls where you selected lines.

29.

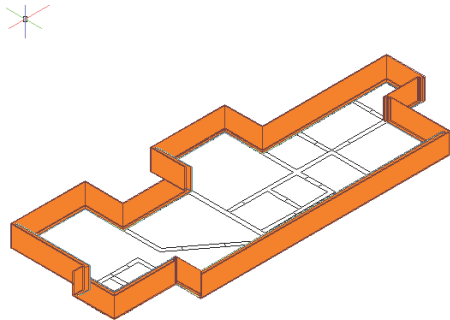


To join the walls together, use FILLET with an R value of 0. Type FILLET, then select the two walls to be joined to form a corner.

30.

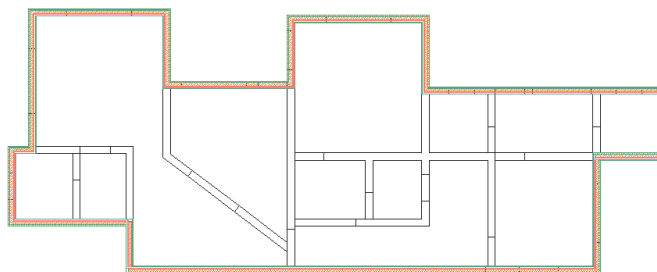


In the plan view, the exterior walls should form a closed figure.

31.

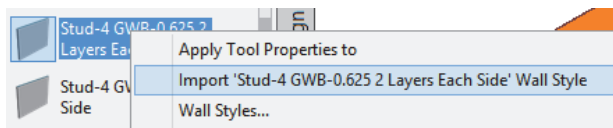


Locate the **Stud-4 GWB-0.625-2 Layers Each Side** wall style. Right click and select **Import Stud-4 GWB-0.625-2 Layers Each Side Wall Style**.

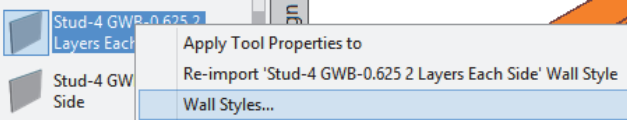32.  Locate the **Stud-4 GWB-0.625-2 Layers Each Side** Wall Style.


Right click and select Wall Styles.
This will launch the Styles Manager.


33. Highlight the **Stud-4 GWB-0.625-2 Layers Each Side** Wall Style.

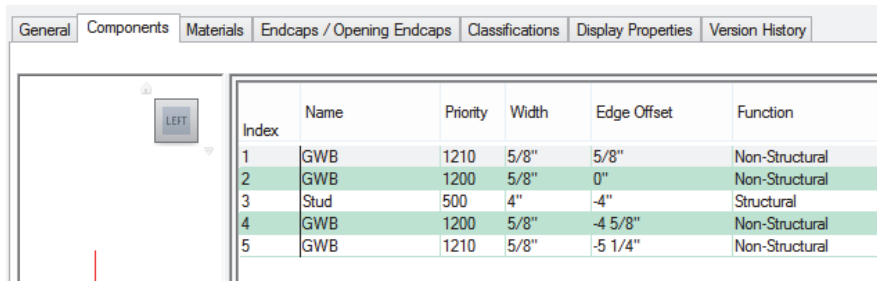

Select the Components tab.

The total width for this wall style is 6.5".


34. 

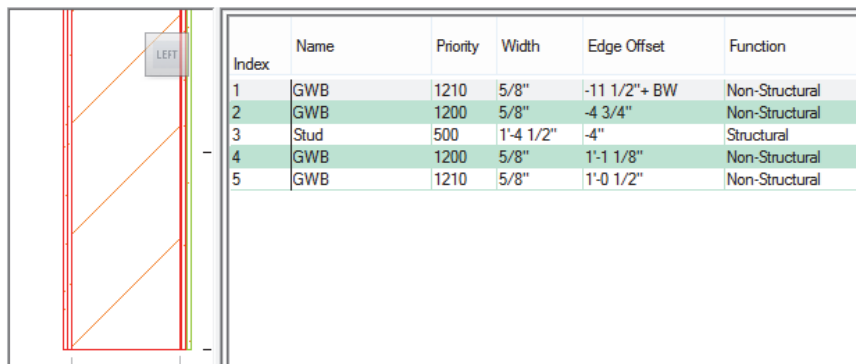

Change the Stud width to **1' 4 1/2"**.

Adjust the positions of the components so that the wall looks proper.

Press **OK** to close the Style Manager.

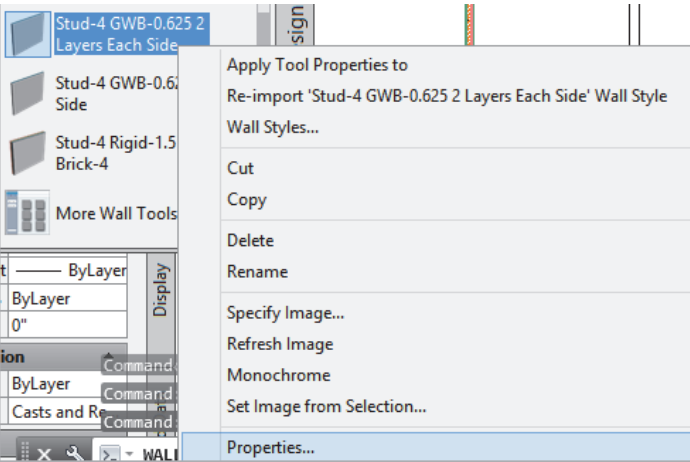
35. 

Switch to a Top view of the floor plan.

Select the **Stud-4 GWB-0.625-2 Layers Each Side** Wall Style.

Right click on the wall style and select **Properties**.


36.

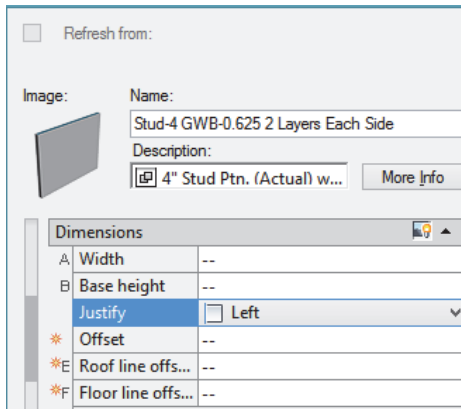

Under Dimensions:
Set Justify to **Left** using the drop-down.


This sets the location line for the wall.

37. Select the **Stud-4 GWB-0.625-2 Layers Each Side** wall style.



Right click and select **Apply Tool Properties to → Linework**.

38.

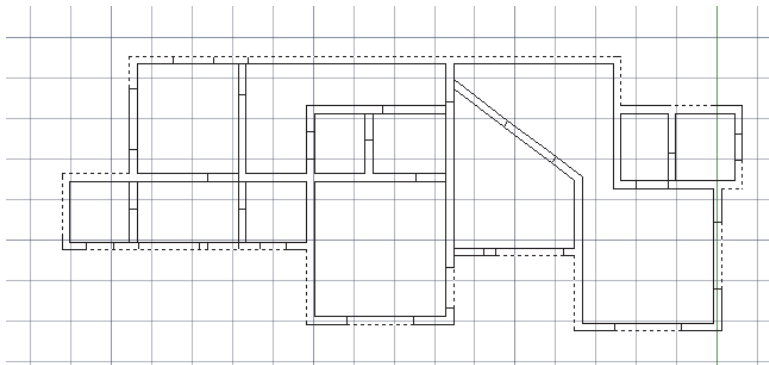


Select the inside segments of the walls.

Do not select any of the exterior walls.

Press ENTER when you are done selecting lines.

39. You will be prompted if you want to erase any of the line work. Enter **NO**.

40.

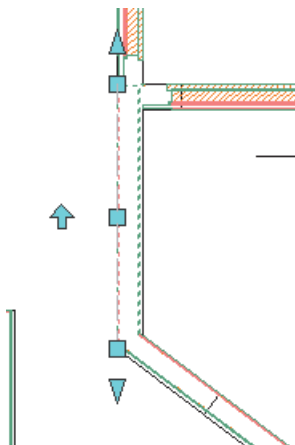


Zoom into one of the walls that was placed. Note that it is the correct width.

The blue arrow indicates the exterior side of the wall. If the blue arrow is inside the building, click on the blue arrow and it will flip the orientation of the wall. Because these are interior walls with gypsum board on both sides, the orientation doesn't matter.


If necessary, move walls so they are aligned with the floor plan's walls.

41.

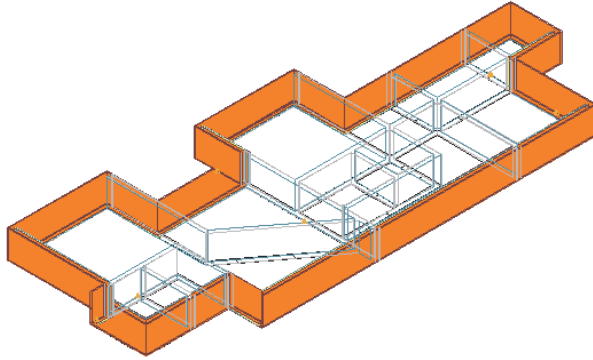

Use the TRIM, EXTEND, and FILLET tools to edit the interior walls.

42.



Some of your walls may display a warning symbol.

This means that you have walls overlapping each other.

Check to see if you have more than one wall or if you need to trim the walls.

43. Save as *ex3-1.dwg*.

The ex3-1 file is available on the DVD, so you can check your file against mine and see how you did.


Exercise 3-2:

Creating Walls


Drawing Name: New
 Estimated Time: 10 minutes

This exercise reinforces the following skills:

- Create Walls
- Wall Properties
- Wall Styles
- Model and Work space

1.  Start a new drawing using QNEW.


2.  Select the **Wall** tool from the Home ribbon.

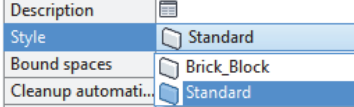

3.  In the Properties dialog, check under the Style drop-down list.
Only the Brick_Block and Standard styles are available.


These are the wall styles that are loaded in the template.


4. Exit out of the command by pressing ESC.


5.  Launch the Design Tools palette from the Home ribbon.


6.  Activate the Walls tab on the palette.
Select the CMU-8 Rigid-1.5 Air-2 Brick-4
[CMU 190 Rigid-038 Air – 050 Brick -090].


7.  Toggle **ORTHO** ON.
 Start the wall at 0,0.
Create a rectangle 72 inches [1830 mm] tall and 36 inches [914 mm] wide.
Place the walls as if you are drawing lines.

8. Select the **Work** tab. 

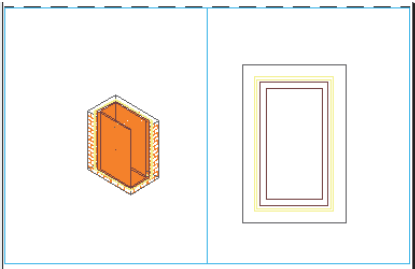9.  The work tab opens up a layout with two viewports. One viewport is 3D and the other viewport is a top view.
You see that the walls you placed are really 3-dimensional.

10.  Switch back to the Model space tab.

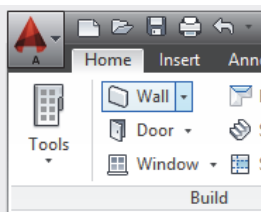11.  Select the **Wall** tool from the Home ribbon.

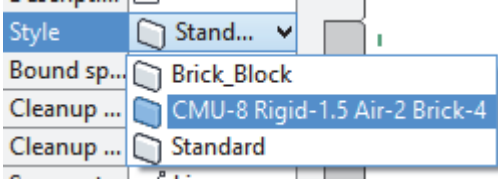12.  In the Properties dialog, check under the Style drop-down list. Note that the CMU wall style is now available under the drop-down list.
13. Exit out of the command by pressing ESC.
14. Save your drawing as *Ex3-2.dwg*.



- If you draw a wall and the materials composing the wall are on the wrong side, you can reverse the direction of the wall. Simply select the wall, right click and select the Reverse option from the menu.
- To add a wall style to a drawing, you can import it or simply create the wall using the Design Tools.
- Many architects use external drawing references to organize their projects. That way, teams of architects can concentrate just on their portions of a building. External references also use less system resources.
- You can convert lines, arcs, circles, or polylines to walls. If you have created a floor plan in AutoCAD and want to convert it to 3D, open the floor plan drawing inside of AutoCAD Architecture. Use the Convert to Walls tool to transform your floor plan into walls.
- To create a freestanding door, press the ENTER key when prompted to pick a wall. You can then use the grips on the door entity to move and place the door wherever you like.
- To move a door along a wall, use Door→Reposition→Along Wall. Use the OSNAP From option to locate a door a specific distance from an adjoining wall.


Exercise 3-3:**Creating a Floor Plan using an Image**

Drawing Name: new.dwg
 Estimated Time: 60 minutes


This exercise reinforces the following skills:

- ❑ Insert Image
- ❑ Add Wall

1. Start a new drawing

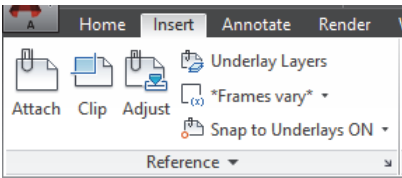2.  Select the **Insert** ribbon.


Select the **Attach** tool.

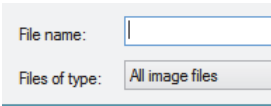3.  Browse to the folder where the exercises are stored.

Change the Files of type to **All image files**.

4.  Select the floorplan1 file.

Press **Open**.

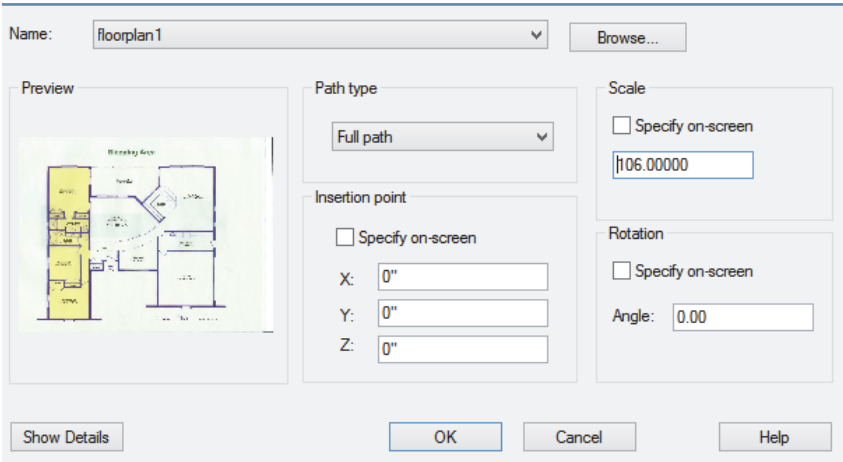5.  Uncheck the insertion point to insert the image at **0, 0, 0**.

Set the Scale to **113.00**.
 Set the Angle to **0.0**.

Press **OK**.

6.  To prevent your image from moving around:

Create a new layer called image.


Select the image.

Right click and select Properties.


Assign the image to the image layer.

Lock the image layer.


7. Open the Design Tools palette.



8. Locate the Stud-4 Rigid 1.5 Air-1 Brick-4 wall style.




9. Draw a wall on the far left side of the floor plan, tracing over the wall shown in the image file.

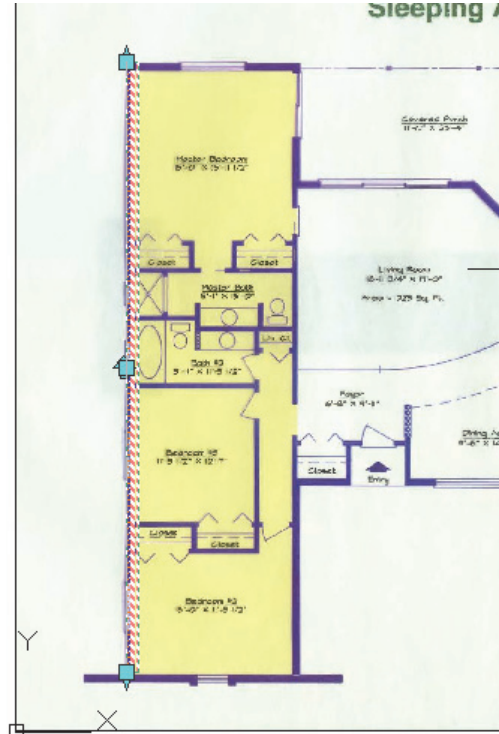

Orient the wall so the exterior side of the wall is on the outside of the building.

10. Offset the wall 15' 11-1/8" to the right.

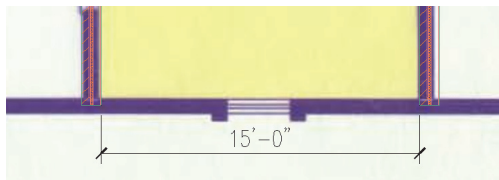



The additional offset takes into account the wall thickness of 11-1/8".

Flip the wall orientation so the wall exterior is on the outside of the building.

Check the offset distance to ensure the two walls are 15' apart from inside finish face to inside finish face.


11. Trace a horizontal wall using the **Stud-4 Rigid 1.5 Air-1 Brick-4** wall style.

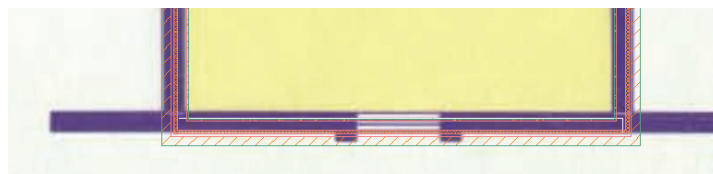

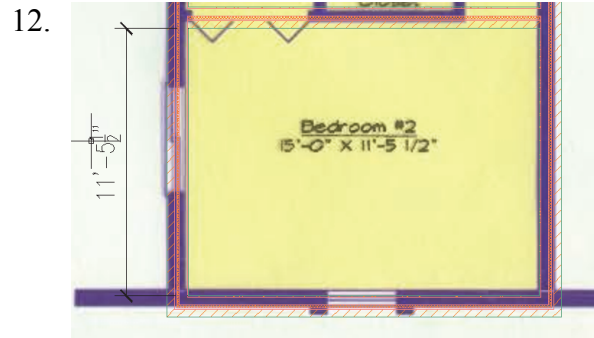


Offset the horizontal wall 12' 4.625".
This is 11' 5 1/2" plus 11 1/8".

Verify that the distance from finish face to finish face is 5 1/2".


13.  Locate the **Stud-4 GWB-0.625 Each Side** wall style on the Design Tools palette.

14. Right click and select **Apply Tool Properties to** → **Wall**.



15.  Select the upper horizontal wall.
 Press **ENTER**.

16.  The wall style will update.

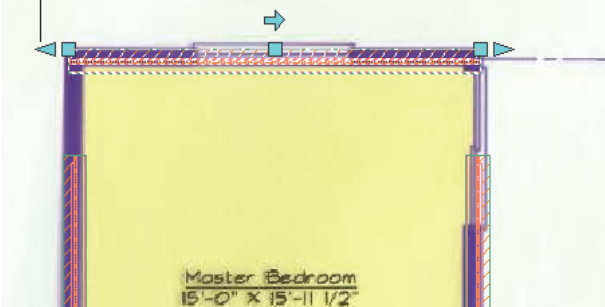17.  Place a **Stud-4 Rigid 1.5 Air-1 Brick-4** wall at the top horizontal location of the Master Bedroom.
 Verify that the orientation is for the exterior side of the wall outside the building.


18.



Use the FILLET command to create corners between the vertical and horizontal walls.


Type FILLET and select the horizontal wall, then select a vertical wall. Repeat for the other side.

19.

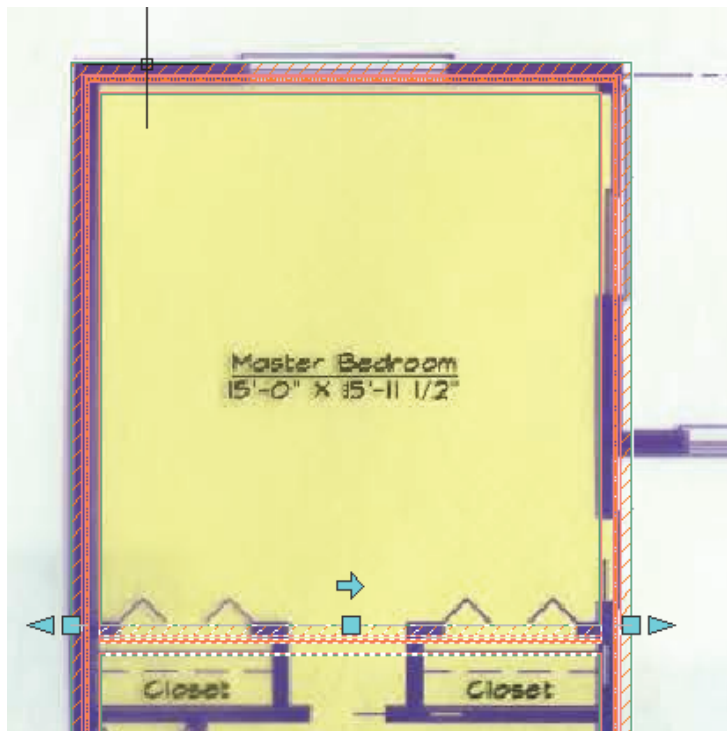


Offset the top horizontal wall 16' 10.625".

20.




Locate the **Stud-4 GWB-0.625 Each Side** wall style on the Design Tools palette.

21. Right click and select **Apply Tool Properties to → Wall**.



22.

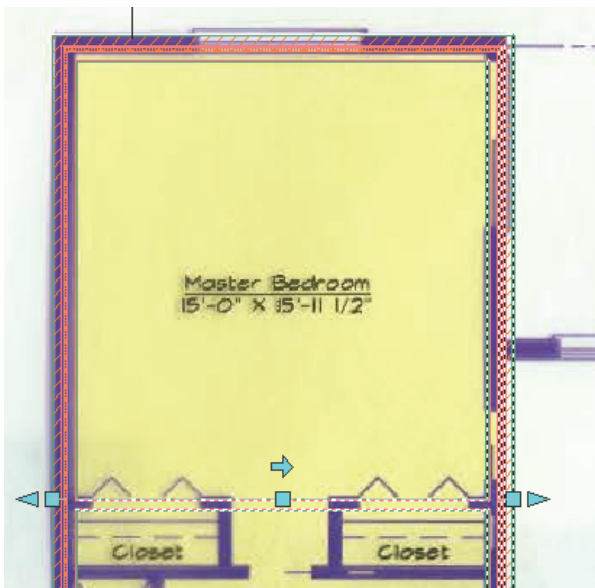

Select the lower horizontal wall.

Press **ENTER**.


23.



Offset the left vertical exterior wall **12' 4.625"**.


Change the offset wall to the interior **Stud-4 GWB-0.625 Each Side** wall style using the **Apply Tool Properties to → Wall**.

24.

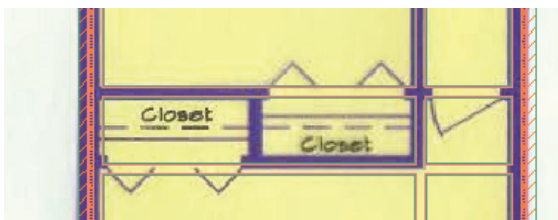


Use an offset of **2' 10"** to create the closet space.

25.

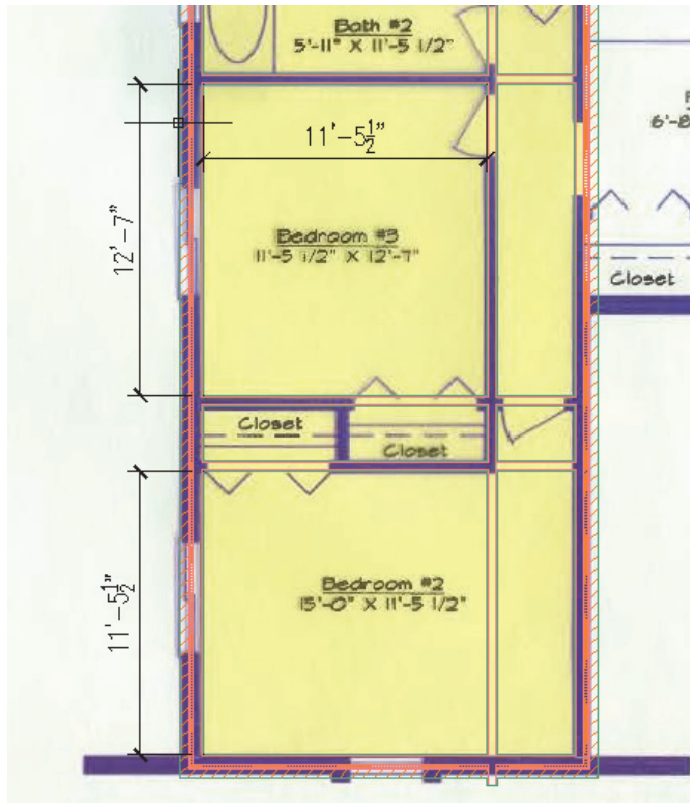

Adjust the position of the walls as needed to ensure they match the floor plan image.

26.




Select the **Stud-4 Rigid 1.5 Air-1 Brick-4** wall tool from the Design Tools palette.


27.

| Dimensions | |
|--------------------------------|-----------|
| A Width | 1'-3 1/2" |
| B Base height | 10'-0" |
| C Length | 1" |
| Justify | Center |
| * Offset | 0" |
| *F Roof line offset from ba... | 0" |


On the Properties palette, set the Justify option to **Center**.

28. Trace the remaining south walls of the floor plan.

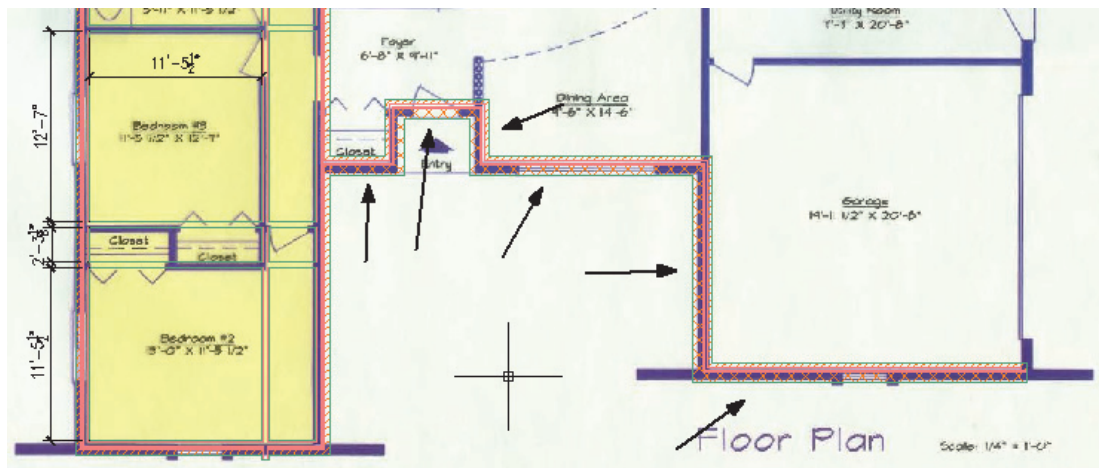

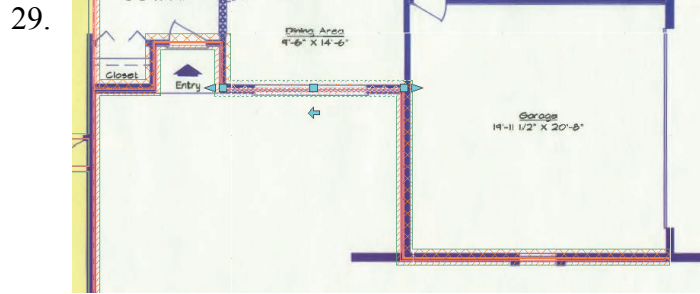


Use the flip arrows to orient the exterior side of the walls to the outside of the building.

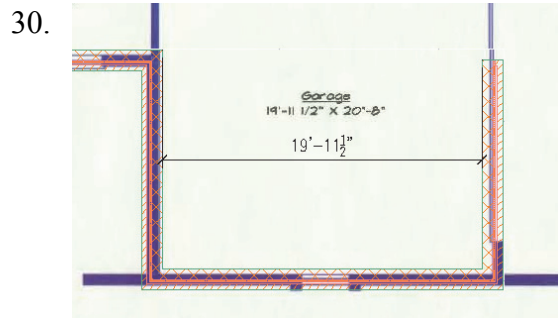


Offset the left garage wall 21' 3\"/>

Verify that the dimension from face to face of the interior side of the walls is 19' 11 1/2\"/>

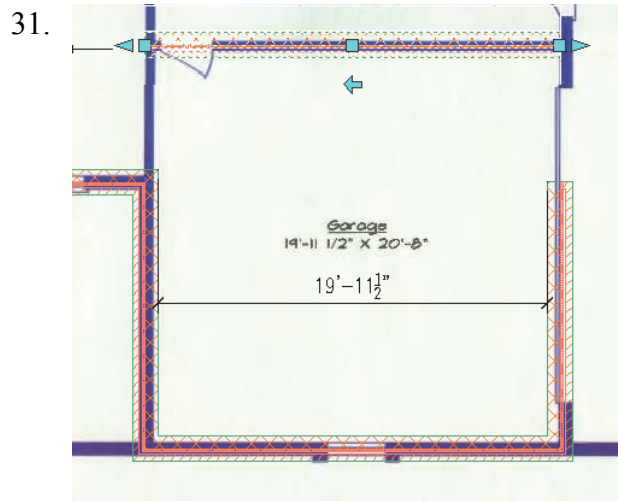

Offset the south garage wall 20' 8\"/>

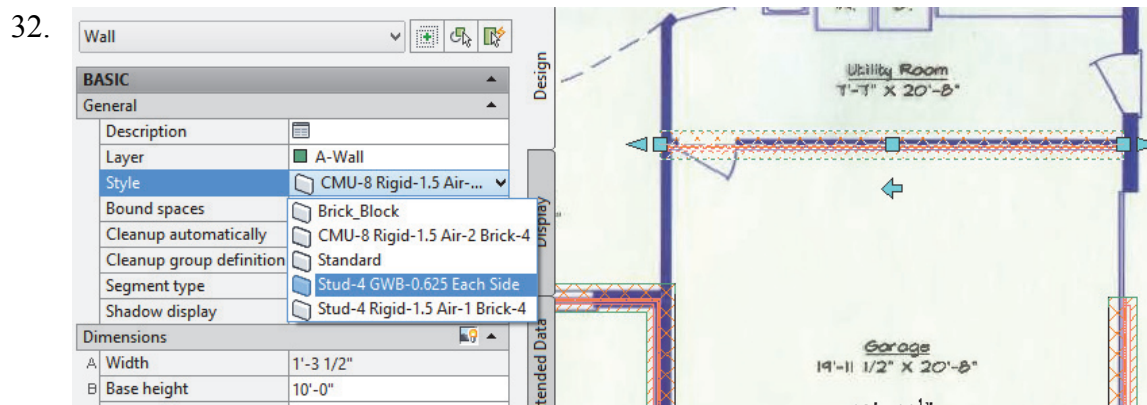


Select the north garage wall.

In the Properties palette:


Change the wall style to **Stud-4 GWB-0.625 Each Side**.

33.

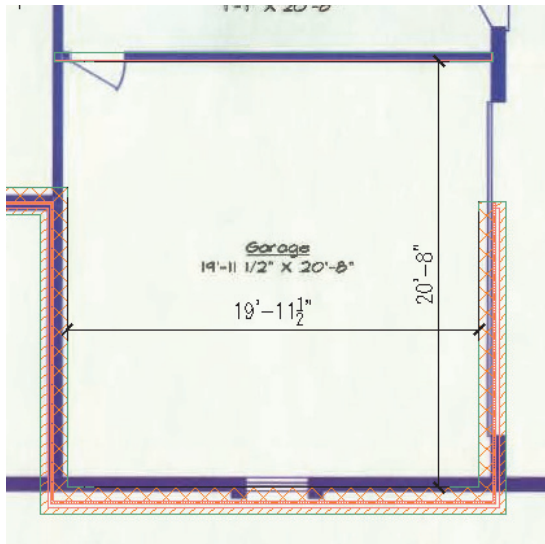

Adjust the position of the garage walls so the distance from interior face to interior face north-south is 20' 8" and the distance from interior face to interior face west-east is 19' 11 1/2".


34.

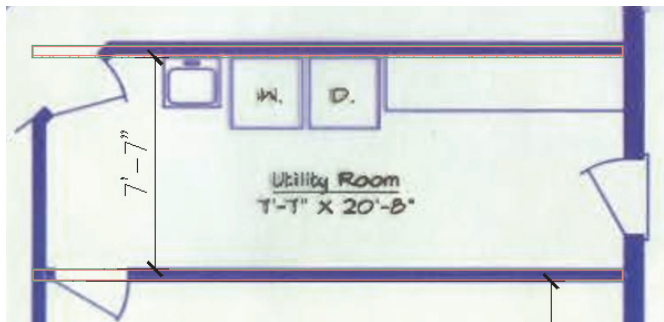

Offset the south utility room wall up 8' 1/4".

Verify that the distance from interior face to interior face is 7' 7".

35.

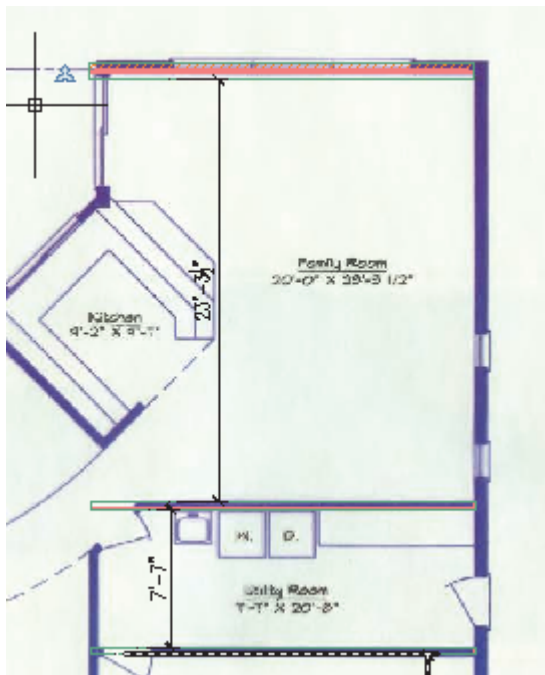


Offset the north utility wall 23' 9.1325".

Assign the top wall to the **Stud-4 Rigid 1.5 Air-1 Brick-4** wall style.


Verify that the distance from interior face to interior face is 23' 3 1/2".

36.

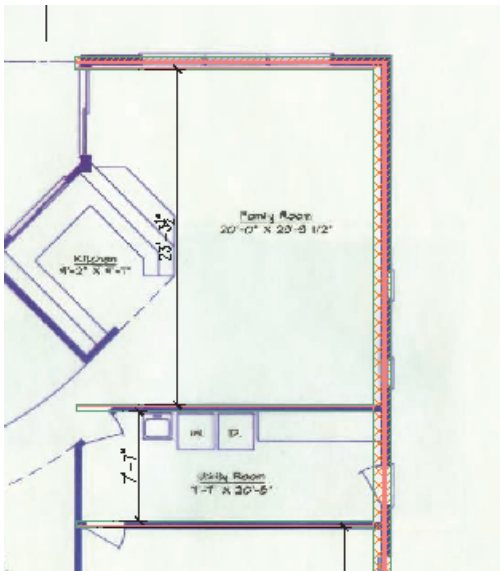

Use the FILLET command to create the north east corner of the building.


37.

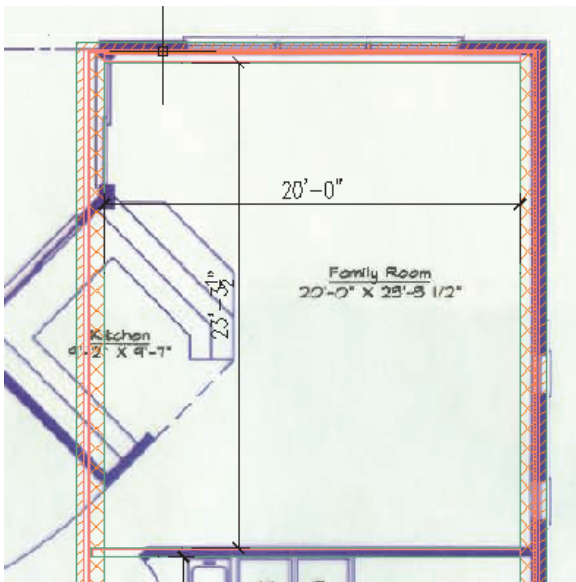

Place the west family room wall.


Verify that the distance from interior face to interior face is 20' 0".

38.

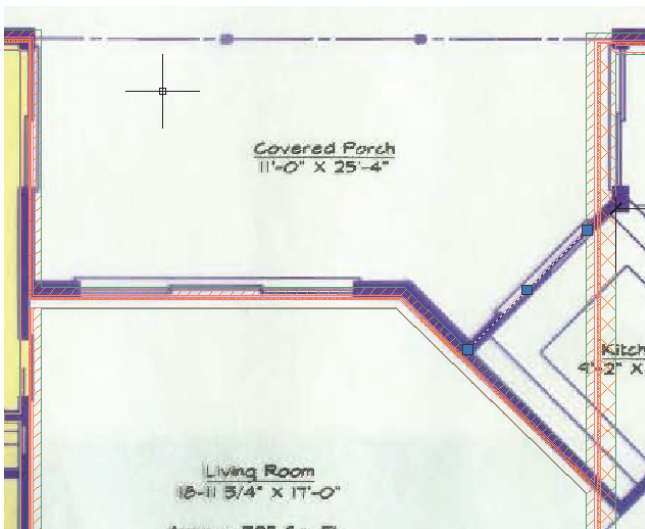


Trace over the floor plan to place the walls for the covered porch.

39.

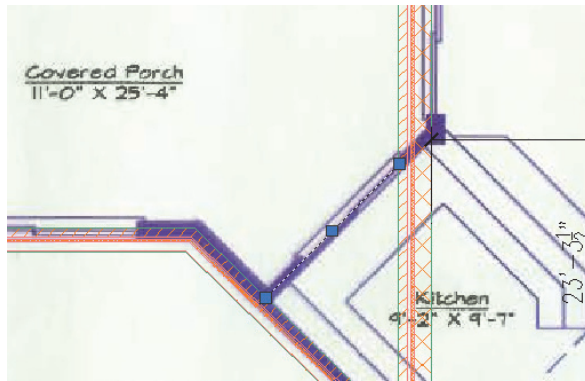


Draw a line at a 45° angle to designate the wall for the kitchen.

40. Locate the **Stud-4 Rigid 1.5 Air-1 Brick-4 Wall** style. Right click and **Apply Tool Properties to** → **Linework** and select the angled line.

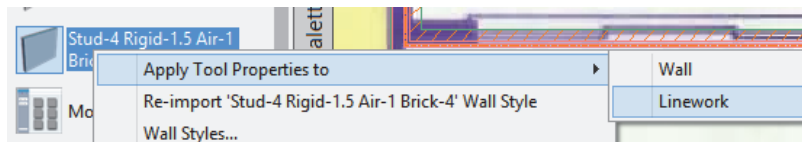


41.




Use the **BREAK** tool to divide the walls that need to be split into the two different styles.

42.

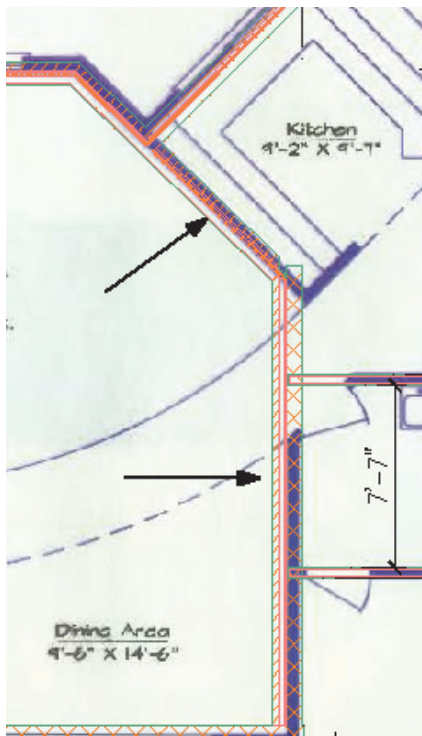


The walls indicated should be broken using the **BREAK** tool so one segment can remain exterior and one segment can be changed to the interior wall style.

43.

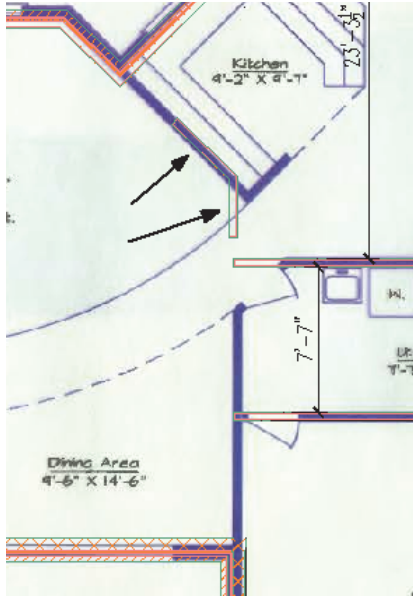


Change the interior wall segments to the interior wall style.


44.

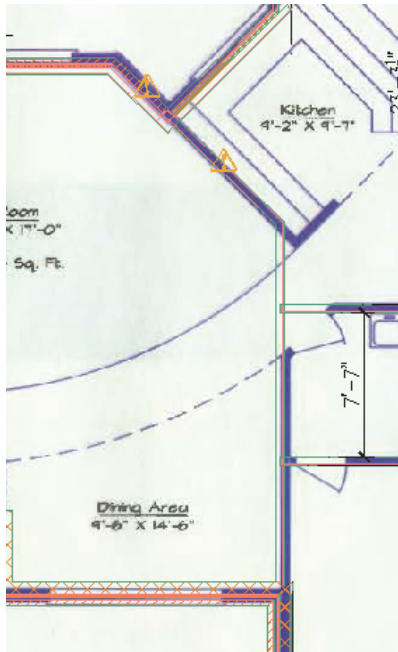



Use the EXTEND tool to extend the interior walls.

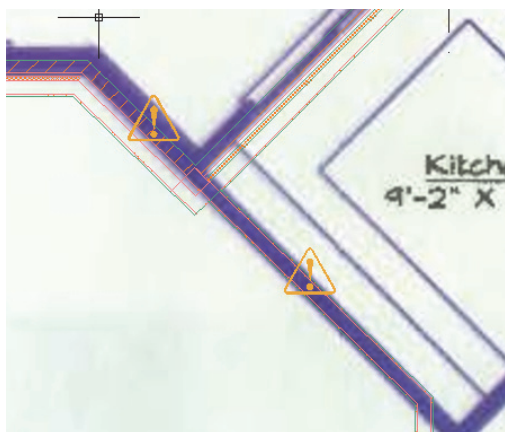



A triangle symbol with an exclamation point indicates that you have a wall interference condition – usually a wall on top of a wall.

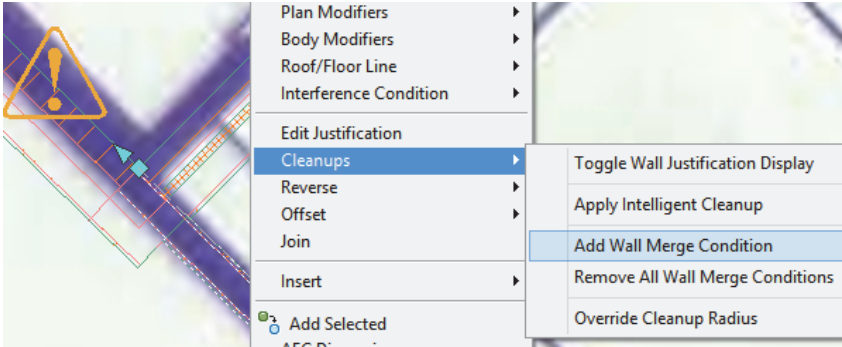
45.  Select the interior wall with the interference condition. Right click and select **Cleanups** → **Add Wall Merge Condition**.

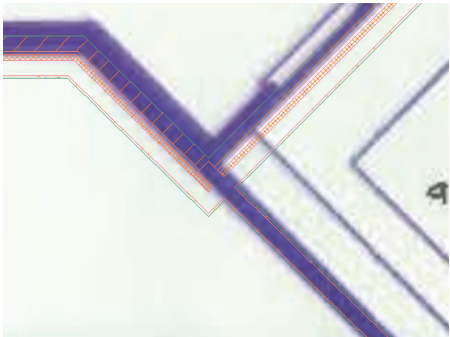46.  Select the two exterior walls where it is interfering. The walls will merge and clean up the intersection area.

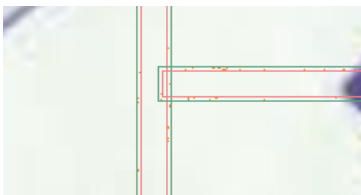
47.  Zoom into the area near the utility room and notice some of the walls may need to be cleaned up as well.

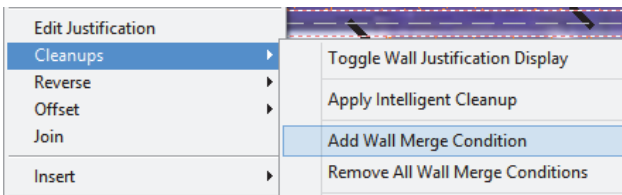48.  Select one of the interior walls. Right click and select **Cleanups** → **Add Wall Merge Condition**.

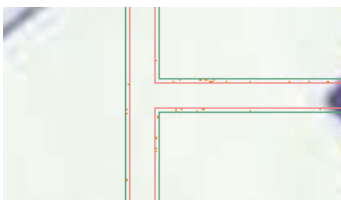49.  Select both walls. The wall intersection cleans up.

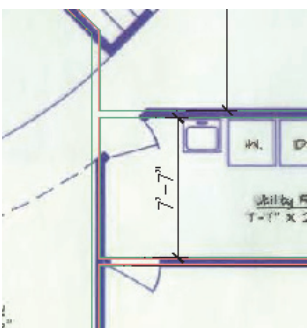50.  Repeat for the south utility wall.


51.

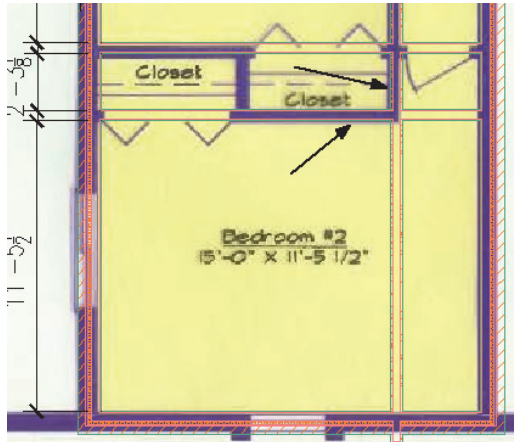

Zoom into the Bedroom #2 area.

Use FILLET to eliminate the extra interior walls. Select the walls at the locations indicated to clean up the room.


52.

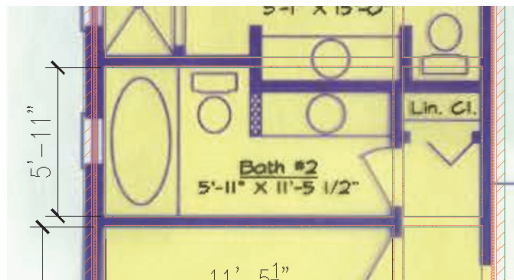

Offset the south bathroom wall 6' 4.25\".

Verify that the distance from interior face to interior face is 5' 11\".


53.

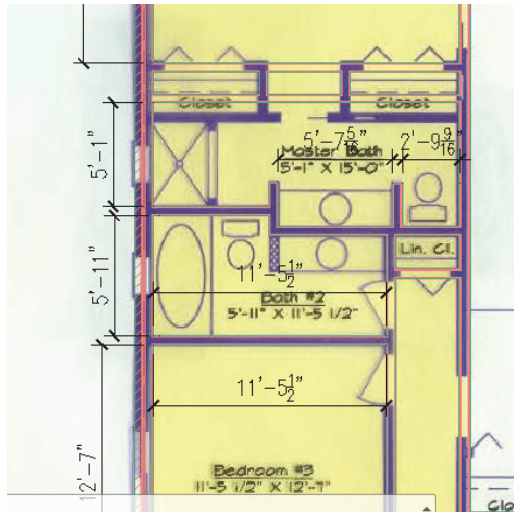

Add the interior walls for the lavatory areas.


Use the wall style: **Stud-4 GWB-0.625 Each Side.**

54.

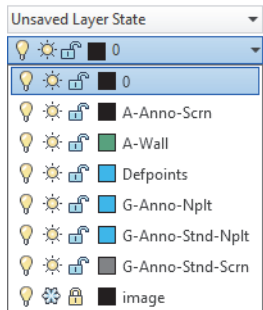

Freeze the image layer to turn off visibility of the image.

55.

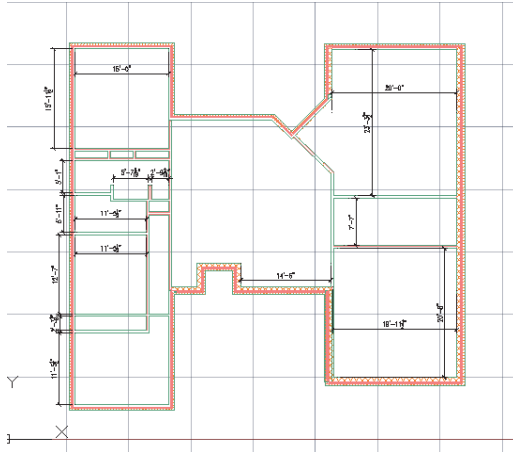

You should have a completed floor plan.

Save as *ex3-3.dwg*.

Exercise 3-4:

Adding Doors

Drawing Name: Ex3-3.dwg

Estimated Time: 45 minutes

This exercise reinforces the following skills:


- Adding Doors
- Door Properties

1.  Open *ex3-3.dwg*.


2.  Thaw the image layer so you can see where doors are located.

3.  Open the Design Tools palette.

4.  Locate the **Bifold-Double** door on the Doors tab of the Design Tools palette.

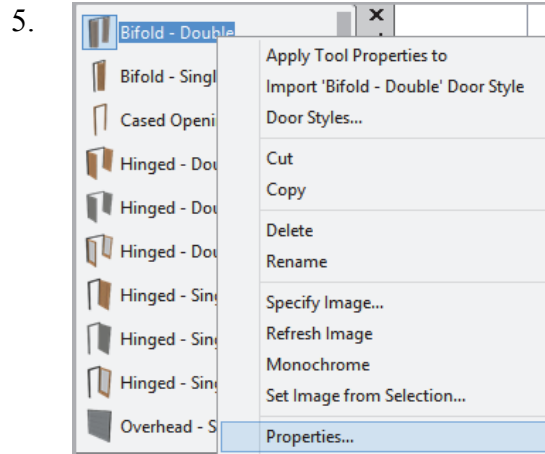

Highlight the **Bifold - Double** door.
Right click and select **Properties**.

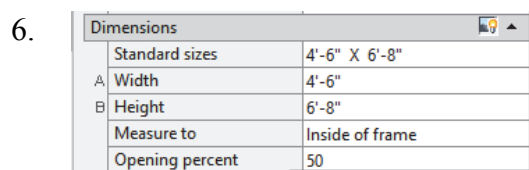

Expand the **Dimensions** section.
Set the Standard sizes to **4'-6" x 6'-8"**.


Set the Opening percent to **50**.

If you left click in the field, a down arrow will appear...select the down arrow and you will get a list of standard sizes. Then, select the size you want.

A 25% opening will show a door swing at a 45-degree angle.

The value of the Opening percentage determines the angle of the arc swing.

A 50% value indicates the door will appear half-open at a 90-degree angle.

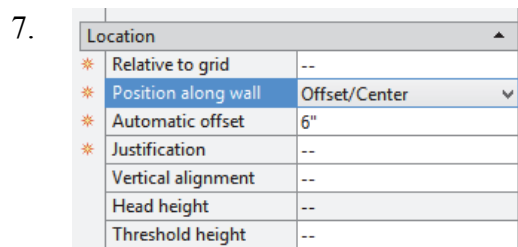


Expand the **Location** section.

Set Position along wall to **Offset/Center**.
This will allow the user to snap to the center position along the wall.


Press **OK** to close the Properties dialog.

8. Place the Bifold - Double doors at the two closets.


The orientation of the door swing is determined by the wall side selected.

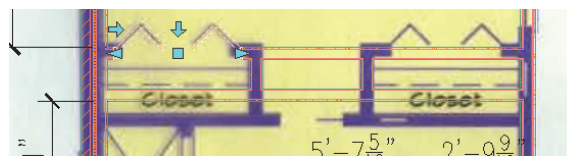

In both cases, you want to select the outside face of the wall.
Center the closet door on each wall.

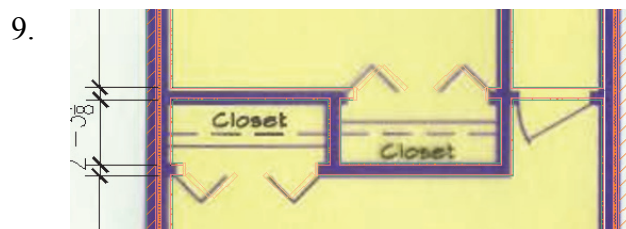


Place the **Bifold - Double** door at each of the closets located in Bedroom #2 and Bedroom #3.

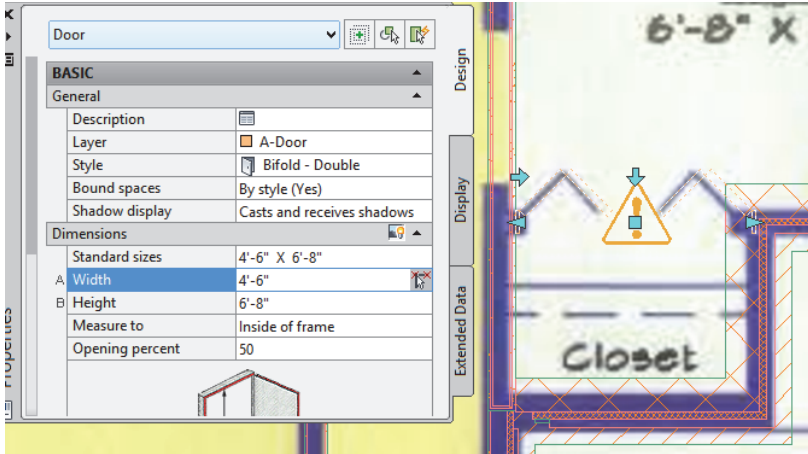10.  Place the **Bifold - Double** door at the closet next to the entry way.


The exclamation mark indicates that the door is too wide for the wall.

| BASIC | |
|-----------------|----------------------------|
| General | |
| Description | |
| Layer | A-Door |
| Style | Bifold - Double |
| Bound spaces | By style (Yes) |
| Shadow display | Casts and receives shadows |
| Dimensions | |
| Standard sizes | 4'-6" X 6'-8" |
| A Width | 4'-6" |
| B Height | 6'-8" |
| Measure to | Inside of frame |
| Opening percent | 50 |

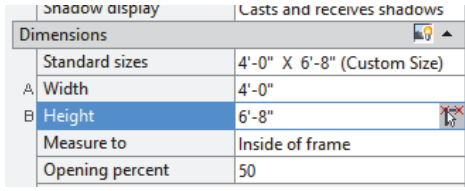11.  Select the door.


In the Properties palette:
Change the width of the Bifold - Double door to **4' 0"**.

| Dimensions | |
|-----------------|-----------------------------|
| Standard sizes | 4'-0" X 6'-8" (Custom Size) |
| A Width | 4'-0" |
| B Height | 6'-8" |
| Measure to | Inside of frame |
| Opening percent | 50 |

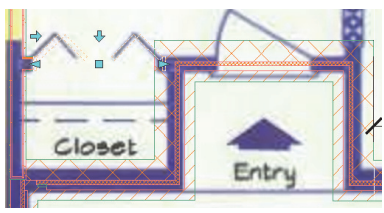 The door updates and the warning symbol disappears.

The door now fits.


12.  Locate the **Bifold - Single** door on the Doors tab of the Design Tools palette.

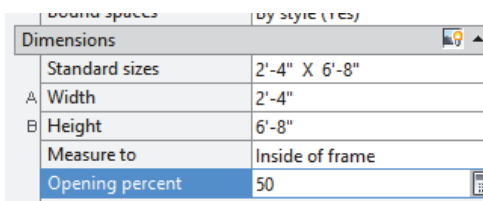13.  In the Properties palette:

Set the door to use the Standard Size **2' 4" x 6' 8"**.

Set the Swing angle to **50**.

| Dimensions | |
|-----------------|-----------------|
| Standard sizes | 2'-4" X 6'-8" |
| A Width | 2'-4" |
| B Height | 6'-8" |
| Measure to | Inside of frame |
| Opening percent | 50 |

14.  Place the door in the Linen Closet near the lavatories.

15.  Locate the **Hinged - Single - Exterior** door on the Doors tab of the Design Tools palette.


16.

| Dimensions | |
|----------------|-----------------|
| Standard sizes | 3'-0" X 6'-8" |
| A Width | 3'-0" |
| B Height | 6'-8" |
| Measure to | Inside of frame |
| Swing angle | 30 |


In the Properties palette:

Set the door to use the Standard Size
3' 0" x 6' 8".

Set the Swing angle to **30**.

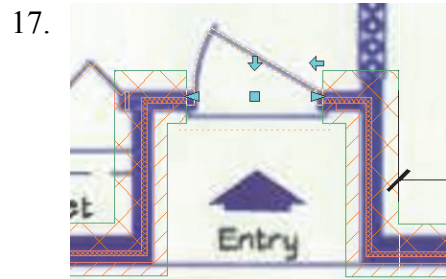

Select the side of the wall that will be used for the door swing and place the entry door.



Locate the **Hinged - Single** door on the Doors tab of the Design Tools palette.


19.

| Dimensions | |
|----------------|-----------------|
| Standard sizes | 2'-6" X 6'-8" |
| A Width | 2'-6" |
| B Height | 6'-8" |
| Measure to | Inside of frame |
| Swing angle | 30 |


In the Properties palette:

Set the door to use the Standard Size
2' 6" x 6' 8".

Set the Swing angle to **30**.

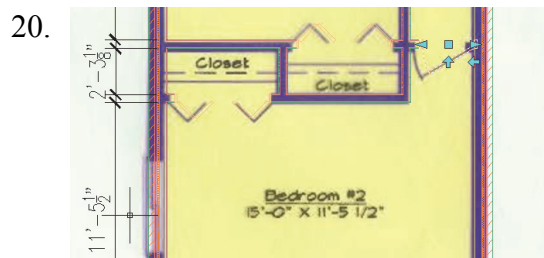


Place the door in Bedroom #2.

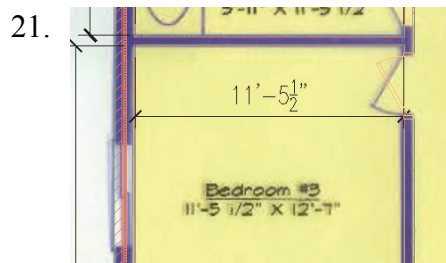

Place the door in Bedroom #3.

The swing is on the correct side, but not the correct direction.




Select the door so it highlights.


The horizontal arrow flips the orientation of the door to the other side of the wall.

The vertical arrow flips the orientation of the door swing.


Left click on the vertical arrow.




The door updates to match the floor plan image.

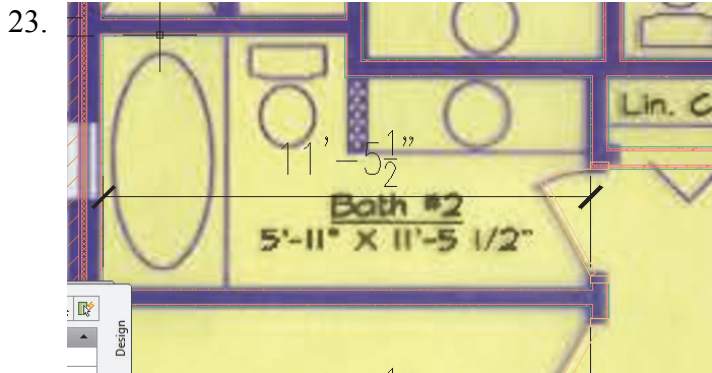


23. Place a **Hinged - Single** door in Bath #2.

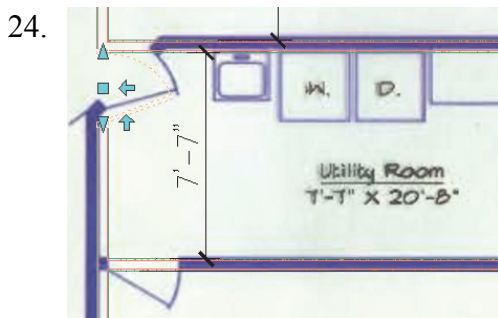


24. Place a **Hinged - Single** door in the Utility Room.
Set the swing angle to **70**.




25. Locate the **Hinged - Single - Exterior** door on the Doors tab of the Design Tools palette.

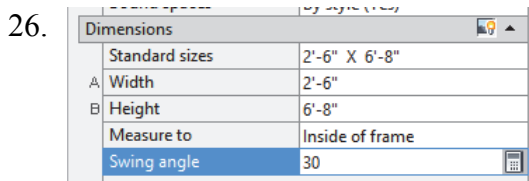



26. In the Properties palette:
Set the door to use the Standard Size **2' 6" x 6' 8"**.
Set the Swing angle to **30**.

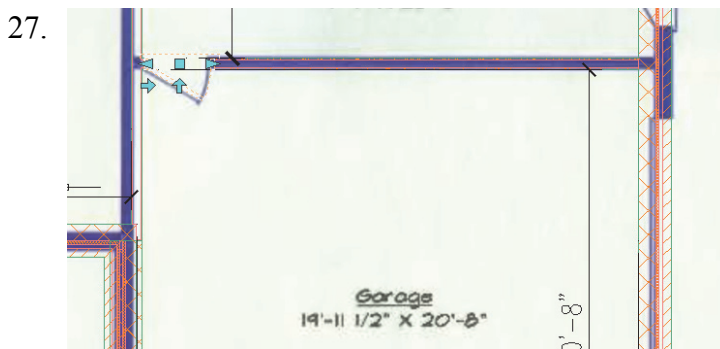


27. Place the door between the Utility Room and the Garage.

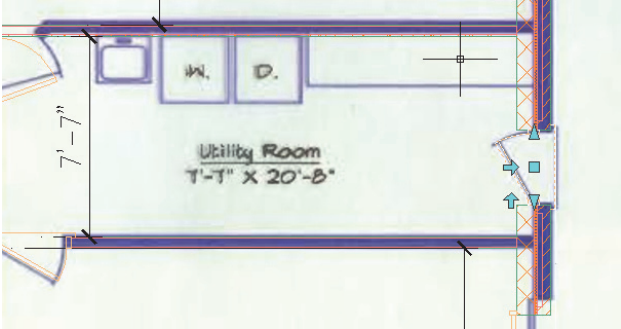
28.  Place the door on the east wall of the Utility Room.


29.  Locate the **Overhead - Sectional** door on the Doors tab of the Design Tools palette.

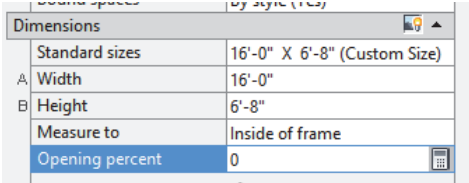
30.  In the Properties palette:
Set the door to use the Standard Size **16' 0" x 6' 8"**.
Set the Swing angle to **0**.

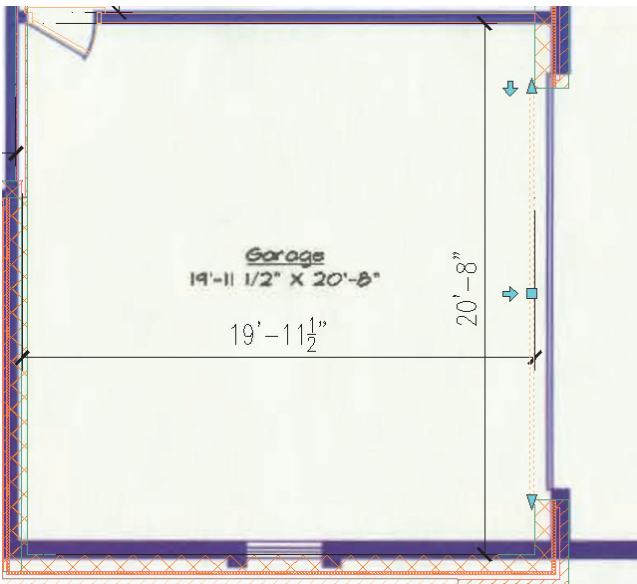
31.  Place the garage door.


32.  Locate the **Sliding - Double - Full Lite** door on the Doors tab of the Design Tools palette.

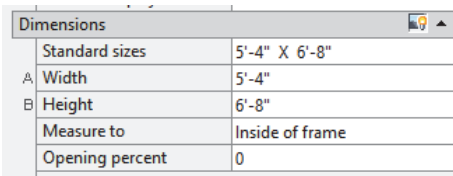33.  In the Properties palette:
Set the door to use the Standard Size **5' 4" x 6' 8"**.
Set the Swing angle to **0**.

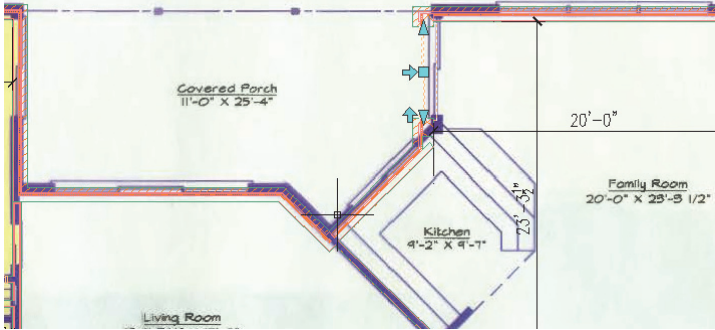
34.  Place the door in the family room.

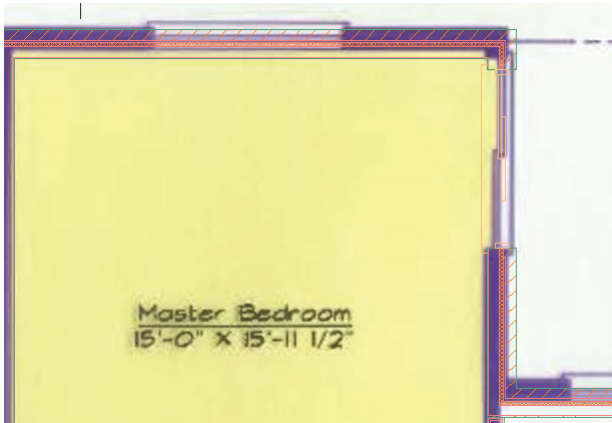35.  Place a second **Sliding - Double - Full Lite** door on the east wall of the Master Bedroom.

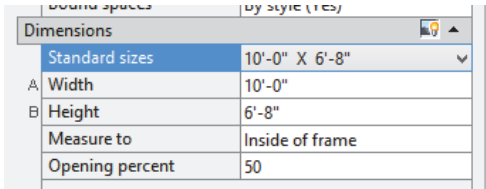
36.  Set the door to use the Standard Size **10' 0" x 6' 8"**.
Set the Swing angle to **50**.

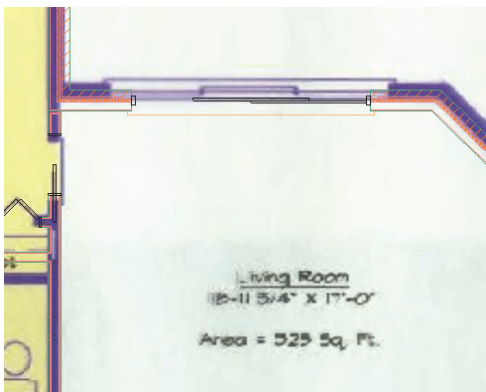37.  Center the door on the north wall of the Living Room.

38.  Locate the **Pocket - Single** door on the Doors tab of the Design Tools palette.

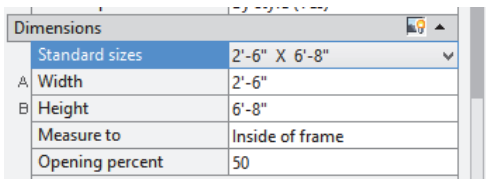39.  In the Properties palette:
Set the door to use the Standard Size **2' 6" x 6' 8"**.
Set the Swing angle to **50**.

40. Place the door in the lower right corner of the Master Bedroom.



41. In the Properties palette:


| Dimensions | |
|-----------------|-----------------|
| Standard sizes | 2'-4" X 6'-8" |
| A Width | 2'-4" |
| B Height | 6'-8" |
| Measure to | Inside of frame |
| Opening percent | 50 |

Set the door to use the Standard Size **2' 4" x 6' 8"**.
Set the Swing angle to **50**.

42. Center the pocket door on the lower horizontal wall between the Master Bedroom closets.




43. Image layer is frozen.
Dimensions were moved to a layer named A-Anno-Dim and then frozen.

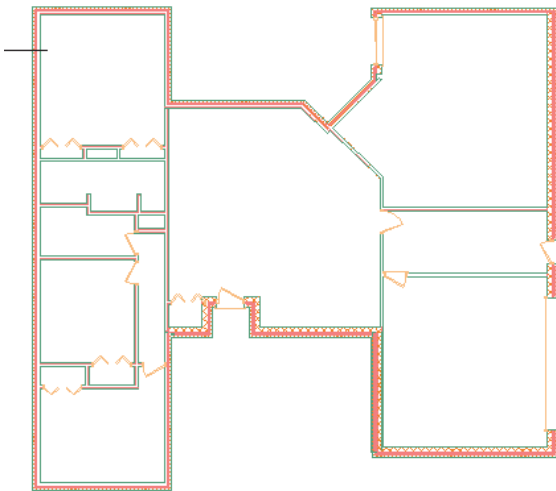

This is the floor plan so far.

44. Save as *ex3-4.dwg*.

Switch to an isometric view and you will see that your model is 3D.

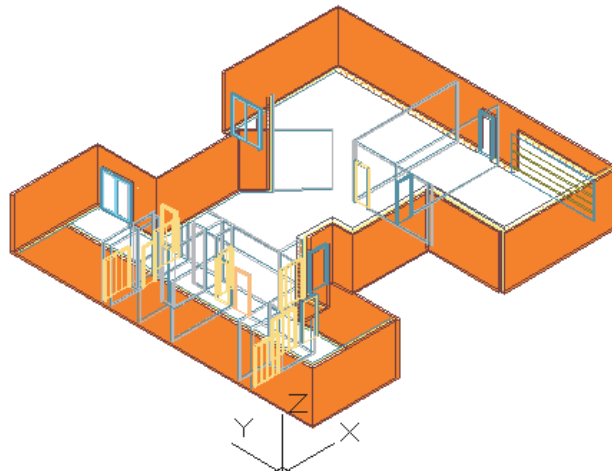

**Exercise 3-5:
Create an Arched Opening Tool**

Drawing Name: ex3-4.dwg
 Estimated Time: 10 minutes

This exercise reinforces the following skills:


- ❑ Copying Tools
- ❑ Tool Properties

1.  Open *ex3-4.dwg*.


2.  Locate the **Cased Opening** tool on the Doors tab of the Tool palette.


3.  Right click and select **Copy**.

4.  Select the **Doors** tab.
 Right click and select **Paste**.


5.  *The copied tool is located at the bottom of the palette.*

Highlight the copied tool.
 Right click and select **Properties**.

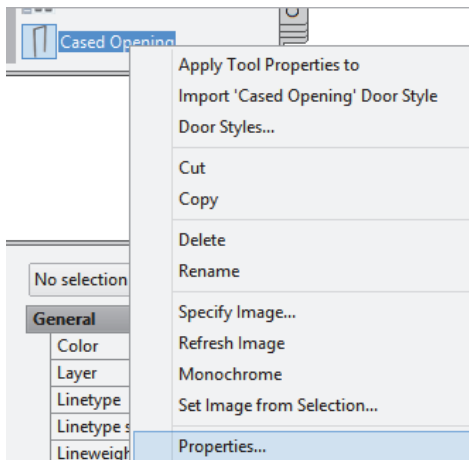


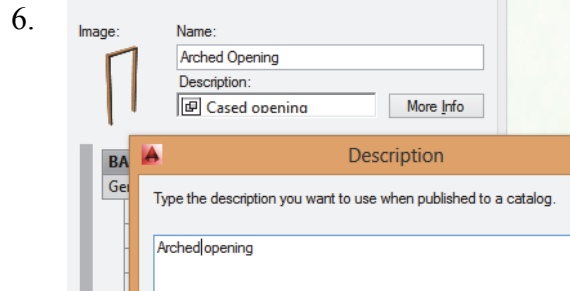

Change the Name to **Arched Opening**.
Change the Description to **Arched Opening**.
Press **OK**.

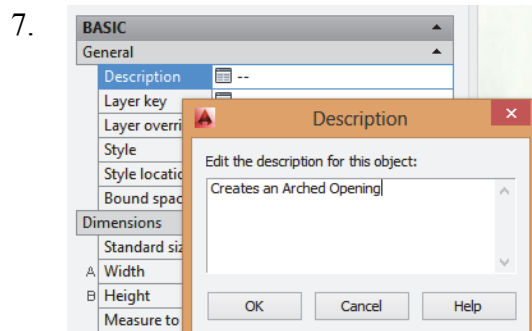


Expand the General section.
Set the Description to **Creates an Arched Opening**.

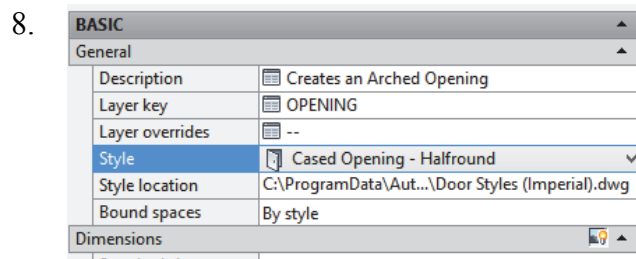

Set the Layer key to **OPENING**.
Set the Style to **Cased Opening-Half round**.

Press **OK**.



The tool is defined in the palette.

9. Save as *ex3-5.dwg*.

Exercise 3-6:

Adding an Opening


Drawing Name: ex3-5.dwg

Estimated Time: 15 minutes

This exercise reinforces the following skills:


- ❑ Adding Openings
- ❑ Opening Properties
- ❑ Copying Tools
- ❑ Set Image from Selection


Openings can be any size and elevation. They can be applied to a wall or be freestanding. The Add Opening Properties allow the user to either select a Pre-defined shape for the opening or use a custom shape.

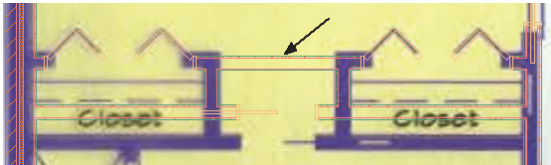



An opening will be added to the upper wall between the Master Bedroom closets.


1.  Open *ex3-5.dwg*.


2.  Select the **Arched Opening** tool.

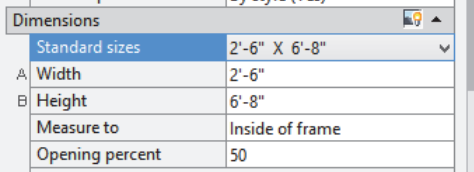3.  In the Properties palette:
Set the door to use the Standard Size **2' 6" x 6' 8"**.
Set the Swing angle to **50**.

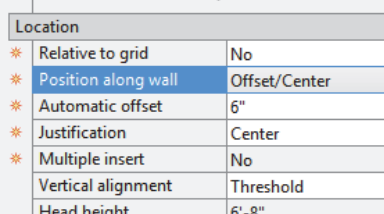
4.  Expand the Location section in the Properties palette.
Set the Position along wall to **Offset/Center**.
Set the Automatic offset to **6" [300.00]**.

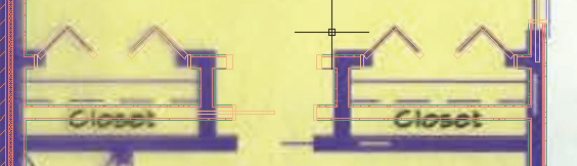5.  Place the arched opening in the wall between the closets in the Master Bedroom. Center it on the wall.

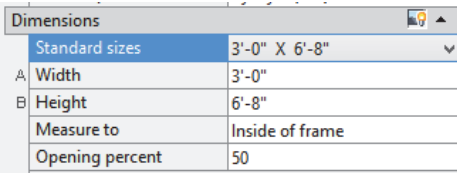
6.  In the Properties palette:
Set the door to use the Standard Size **3' 0" x 6' 8"**.
Set the Swing angle to **50**.

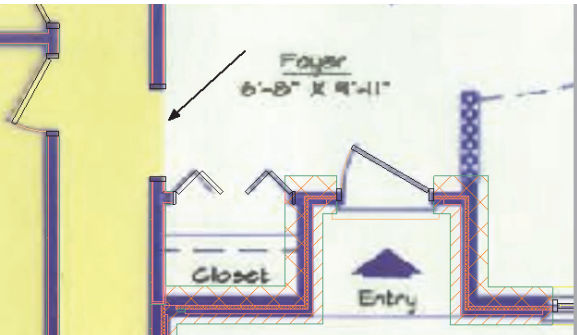7.  Place the Arched Opening on the left side of the Foyer above the Entry.

8. Use the View tools on the View ribbon **View** → **NE Isometric** and **3D orbit** to view the arched opening.




9. On the View ribbon:

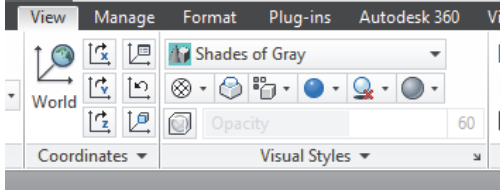


Switch to a **Shades of Gray** display.

If your walls are reversed, you can change the orientation in the plan/top view.

10. Set the **Materials/Textures On**.

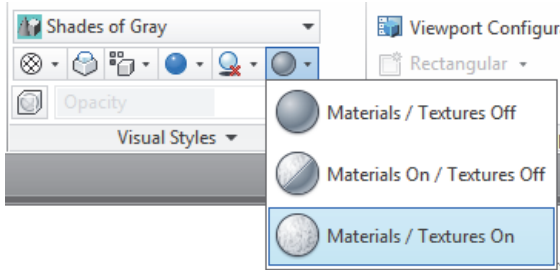


11. Set to **Full Shadows**.

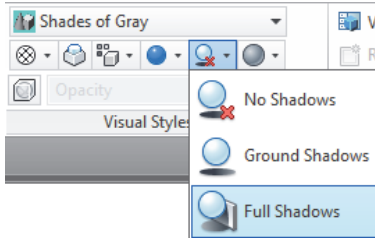


Note how the display changes.

When materials, textures, and shadows are enabled, more memory resources are used.

12. Locate the Arched Opening placed in the Master Bedroom.

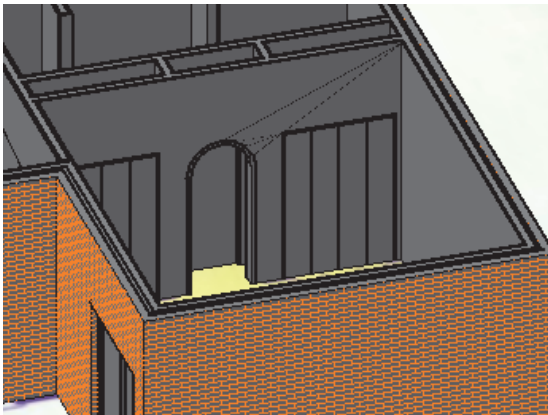


13. Select the **Arched Opening** icon on the tool palette. Right click and select **Set Image from Selection...** Pick the arched opening you created. Press **Enter**.

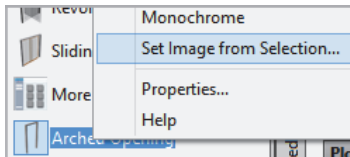

A dialog box allows you to choose which object to use for the image selection.




If you have Selection Cycling enabled, you will see a selection dialog box.




Select **Opening**.

Press **Enter**.

You can select more than one object for your image selection.



The tool icon updates with the new image.

14. Select the Work tab to view your model. 
15. Save the file as *ex3-6.dwg*.

Exercise 3-7

Add Window Assemblies


Drawing Name: ex3-6.dwg
 Estimated Time: 30 minutes


This exercise reinforces the following skills:


- Add Windows


1.  Open *ex3-6.dwg*.


2.  Activate the **Design Tools** from the Home ribbon, if they are not launched.




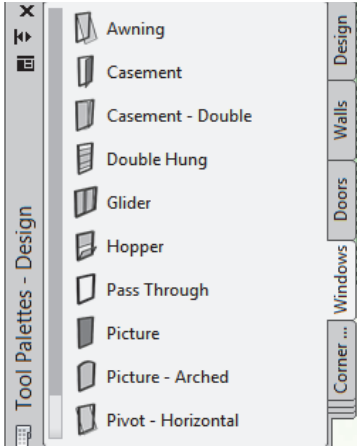
3.  Select the Windows tab of the Tool palette.

4.  Select the **Picture** window.

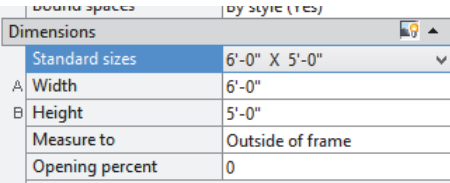
5.  Expand the Dimensions section.
Set the size to **6'-0" x 5'-0"**.
- | Dimensions | |
|-----------------|------------------|
| Standard sizes | 6'-0" X 5'-0" |
| A Width | 6'-0" |
| B Height | 5'-0" |
| Measure to | Outside of frame |
| Opening percent | 0 |

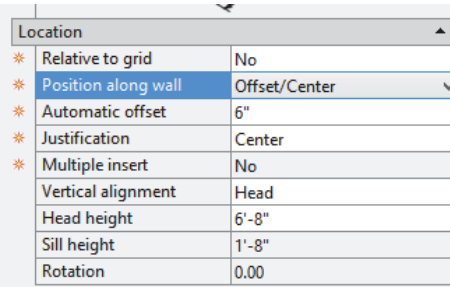6.  Expand the Location section.
Set the Position to **Offset/Center**.
Set the Automatic Offset to **6"**.
- | Location | |
|-----------------------|---------------|
| * Relative to grid | No |
| * Position along wall | Offset/Center |
| * Automatic offset | 6" |
| * Justification | Center |
| * Multiple insert | No |
| Vertical alignment | Head |
| Head height | 6'-8" |
| Sill height | 1'-8" |
| Rotation | 0.00 |

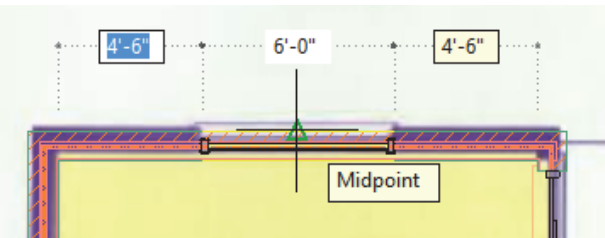7.  Select the midpoint of the north Master Bedroom wall.

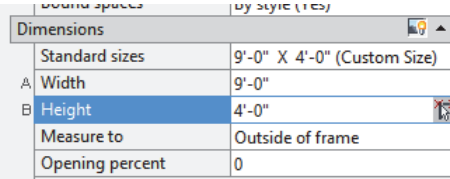
8.  On the Properties palette:
Expand the Dimensions section.
Change the Width to **9'-0"**.
Change the Height to **4'-0"**.
- | Dimensions | |
|-----------------|-----------------------------|
| Standard sizes | 9'-0" X 4'-0" (Custom Size) |
| A Width | 9'-0" |
| B Height | 4'-0" |
| Measure to | Outside of frame |
| Opening percent | 0 |

9.

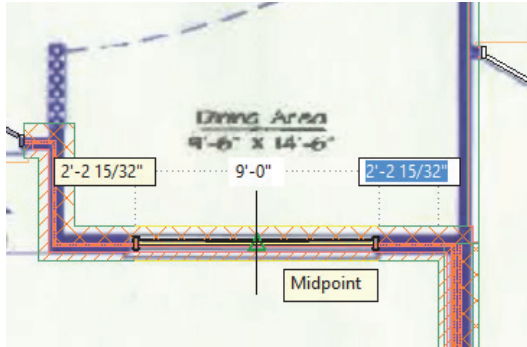

Place the window at the midpoint of the south wall in the Dining Area.

10.

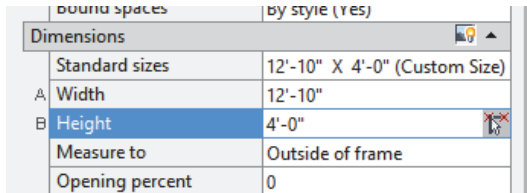


On the Properties palette:

Expand the Dimensions section.

Change the Width to **12'-10"**


Change the Height to **4'-0"**.

11.

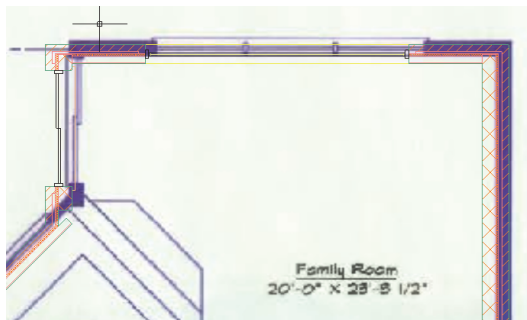

Place the window at the midpoint of the north wall for the Family Room.

12.

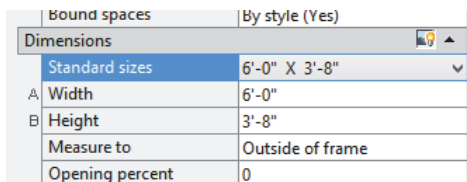


On the Properties palette:

Expand the Dimensions section.

Change the Width to **6'-0"**.


Change the Height to **3'-8"**.

13.

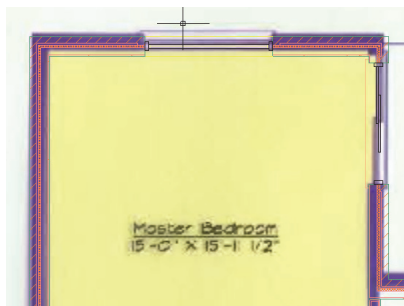


Place the window at the midpoint of the north Master Bedroom wall.

14.



Select the **Casement - Double** window on the Design Tools palette.

15.

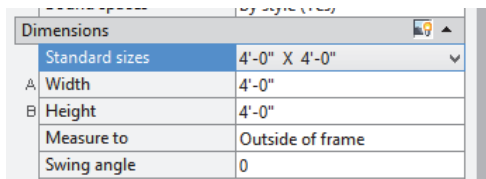


On the Properties palette:

Expand the Dimensions section.

Change the Width to **4'-0"**.


Change the Height to **4'-0"**.

16.

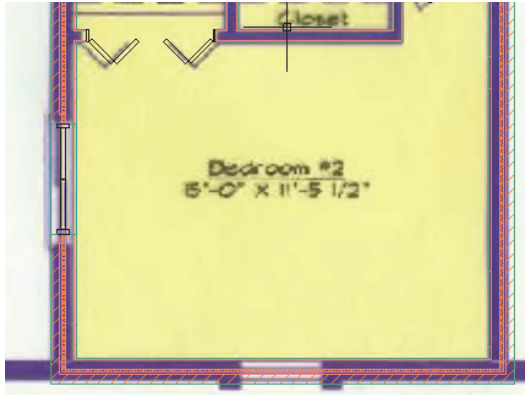


Place the window in the west wall of Bedroom #2.

17.

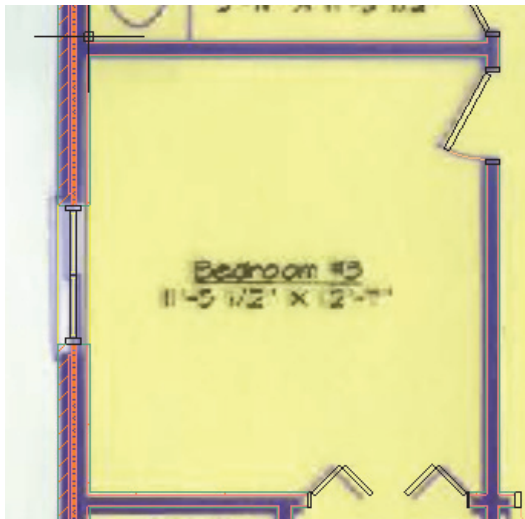


Place the window in the west wall of Bedroom #3.

18.



Casement Select the **Casement** window.

19.

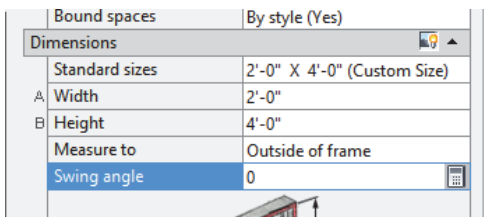


On the Properties palette:

Expand the Dimensions section.

Change the Width to **2'-0"**.


Change the Height to **4'-0"**.

20.

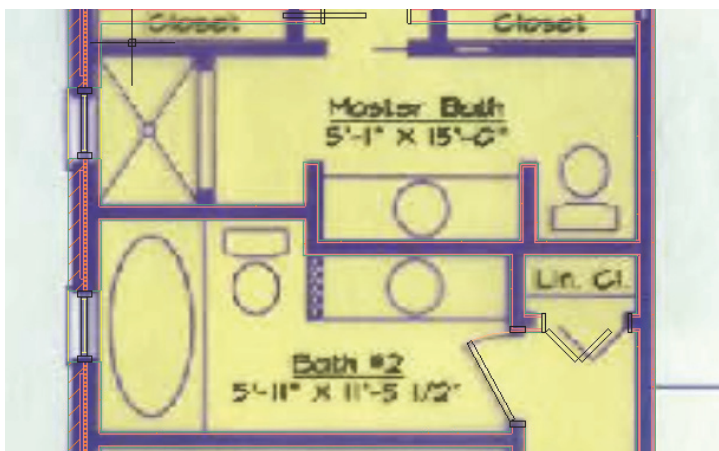

Place two windows on the west wall of the bathrooms.

21.

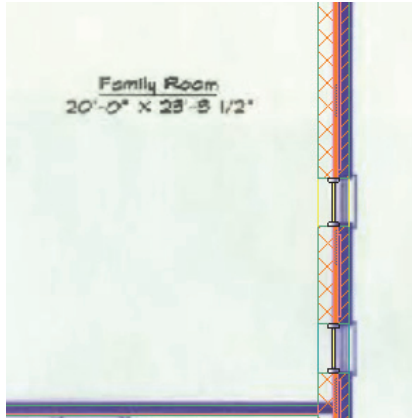

Place two windows on the east wall of the Family Room.

22.

| Dimensions | |
|----------------|-----------------------------|
| Standard sizes | 3'-0" X 4'-0" (Custom Size) |
| A Width | 3'-0" |
| B Height | 4'-0" |
| Measure to | Outside of frame |
| Swing angle | 0 |

On the Properties palette:

Expand the Dimensions section.

Change the Width to **3'-0"**.

Change the Height to **4'-0"**.

23.



Place the window in the south wall of the Garage.

24. Save as *ex3-7.dwg*.






Exercise 3-8:**Adding a Fireplace**

Drawing Name: ex3-7.dwg
 Estimated Time: 20 minutes


This exercise reinforces the following skills:

- ❑ Using the Design Center
- ❑ Adding Openings

In this exercise, we add a fireplace to the family room. You can download the fireplace from the publisher's website.

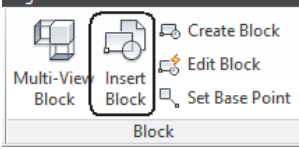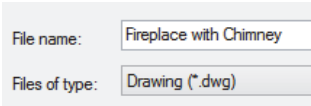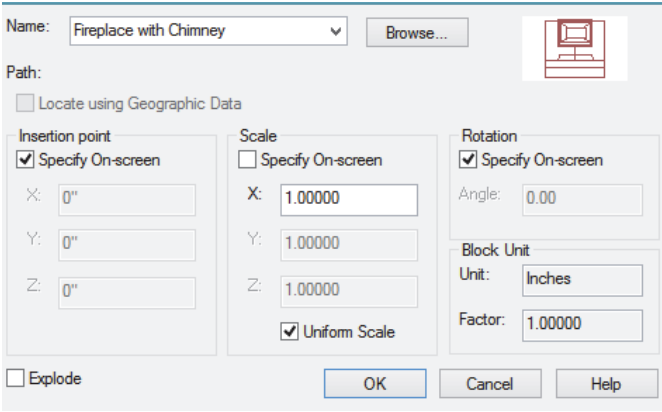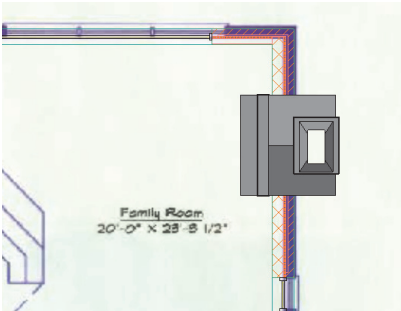1.  Open *ex3-7.dwg*.
2.  Activate the **Insert** ribbon.
 Select **Insert Block**.
3.  Locate the *Fireplace with Chimney* file.
This file can be downloaded from the book's detail page on the publisher's website at www.SDCpublications.com.
4.  Under Insertion point:
 Enable **Specify On-Screen**.
 Under Rotation:
 Enable **Specify On-Screen**.
 Disable **Explode**.
 Press **OK**.
5.  Place the fireplace in the west family room wall.
Use a midpoint osnap to help place the fireplace. You can also Shift-right click to select a midpoint snap on the fly.
Rotate the block so it is facing into the room.


6. Set the display to **Shaded**.

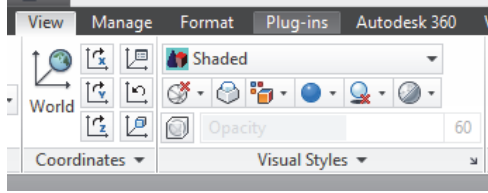

7. Use the ViewCube tool to inspect your work so far.




8. Use the 3D Orbit tool to inspect how the fireplace appears.

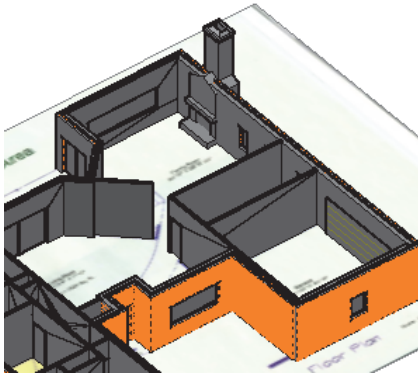


We need to add an opening

Switch back to a plan view.


9. Set the display to **2D Wireframe**.

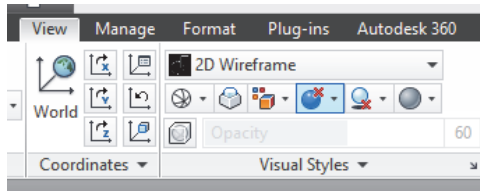


10. Activate the **Home** ribbon.
Launch the **Design Tools** palette.




11. Select the **Opening** tool from the Design palette.

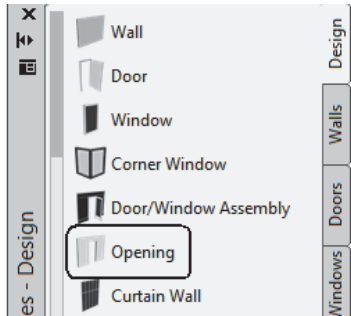


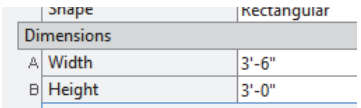12.  Change the Width to **3'-6" [914.4]**.
Change the Height to **3'-0" [862.6]**.

13.  Place the opening in the wall.

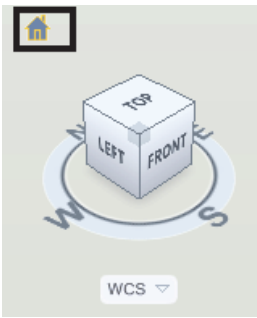14.  Select the Home icon to switch to a 3D view.
Then use the ViewCube to inspect the opening in the fireplace.

Your finished fireplace and chimney should look similar to this.

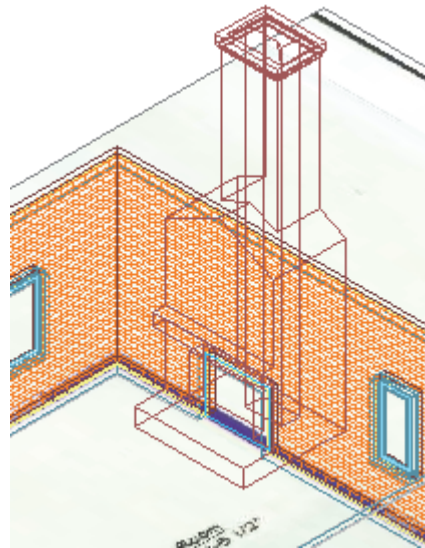

15. Save the file as *ex3-8.dwg*.

Close all open drawings.

You can do this by typing **CLOSEALL** on the command line.